

The Grange, Bank Lane, Roehampton

# TRAVEL PLAN STATEMENT

for Residential Development

on behalf of Bank of England

2026/9552/TPS02

October 2026

www.rgp.co.uk

## DOCUMENT CONTROL

| | |
|---|---|
| **Project:** | The Grange, Bank Lane, Roehampton for Residential Development |
| **Report Type:** | Travel Plan Statement |
| **Client:** | Bank of England |
| **Reference:** | 2026/9552/TPS02 |

## Document Checking

| | | | |
|---|---|---|---|
| Author: | KB | Date: | 08/09/2026 |
| Checked by: | AB | Date: | 16/09/2024 |
| Approved by: | CS | Date: | 28/09/2024 |

## DOCUMENT STATUS

| Issue | Date | Status | Issued by |
|---|---|---|---|
| 1. | 29/09/2026 | Draft | CS |
| 2. | 20/10/2026 | Issued | AB |
| 3. | | | |
| 4. | | | |
| 5. | | | |
| 6. | | | |

**© Copyright RGP Consulting Engineers Limited 2026**

No part of this publication may be reproduced by any means without the prior permission of RGP Consulting Engineers Limited.

## TABLE of CONTENTS


1 INTRODUCTION ..... 4
1.1 Background ..... 4
1.2 Why a Travel Plan Statement? ..... 4
1.3 Travel Planning Policy ..... 5
1.4 Travel Planning Benefits ..... 5
2 KEY AIMS OF THIS TRAVEL PLAN STATEMENT ..... 7
3 BASELINE CONDITIONS ..... 8
3.1 Site Location and Local Highway Network ..... 8
4 ACCESSIBILITY CREDENTIALS ..... 9
4.1 Overview ..... 9
4.2 PTAL ..... 9
4.3 Sustainable Access Measure (SAM) ..... 10
4.4 Census 2011 Journey to Work Analysis ..... 10
4.5 Walking ..... 11
4.6 Cycling ..... 12
4.7 Micromobility ..... 14
4.8 Bus Services ..... 15
4.9 Rail / Underground Services ..... 16
4.10 Multi-Modal Complete Journey Trips ..... 17
4.11 Car Clubs ..... 18
4.12 Taxi / Uber ..... 18
4.13 Summary of Accessibility Credentials ..... 18
5 DEVELOPMENT PROPOSALS ..... 19
5.1 Overview ..... 19
5.2 Access ..... 19
5.3 Census Car Ownership Analysis ..... 20
5.4 Car Parking Provision ..... 21
5.5 Proposed Cycle Parking Provision ..... 21
5.6 Delivery Arrangements ..... 22
5.7 Servicing Arrangements ..... 22
5.8 Development Proposals Summary ..... 23
6 AIMS, OBJECTIVES AND TARGETS ..... 24
6.1 Aims and Objectives ..... 24
7 MEASURES AND INITIATIVES ..... 25
7.1 Implementations ..... 25
7.2 Effectiveness of Travel Plan Measures ..... 26


## Appendices


Appendix A Site Layout Plan
Appendix B 2011 Journey to Work Census Data

Appendix C 2021 Car Ownership Census Data
Appendix D Action / Implementation Plan

## Drawings

TGL-RGP-XX-XX-DR-T-001 Parking Allocation Plan
TGL-RGP-XX-XX-DR-T-002 Emergency Swept Path
TGL-RGP-XX-XX-DR-T-003 Servicing Swept Path

## List of Figures

Figure 1 Site Location ..... 8
Figure 2 WebCAT PTAL Map ..... 9
Figure 3 Anticipated Mode Split (2011 Census Journey to Work Data – Resident Population) ..... 10
Figure 4 Key Destinations within a 15-Minute Walk ..... 11
Figure 5 E-bike and E-scooter Docking Parking Area – Bank Lane ..... 13
Figure 6 Local Centres within a 15-Minute Cycle ..... 14
Figure 7 Designated Cycle-Hire Parking Bays ..... 14
Figure 8 Summary of Local Bus Services ..... 16
Figure 9 Multi-Modal Complete Journey Trips from the site ..... 17
Figure 10 Existing Access ..... 20
Figure 11 Anticipated Car Ownership and Parking Demand ..... 21
Figure 12 London Plan Cycle Standards ..... 22

# 1 INTRODUCTION

## 1.1 Background

1.1.1 This Travel Plan Statement is prepared by RGP on behalf of Bank of England in relation to the proposed residential development at The Grange, Bank Lane, Roehampton SW15 5JT ("the site"). The site lies within the jurisdiction of Wandsworth Council as planning authority and Wandsworth and TfL, as highway authority.

1.1.2 The site is located at The Grange, Bank Lane, a quiet street within Roehampton, southwest London. The site is located approximately 500 metres north of Richmond Park's Roehampton Gate, and 1.5 kilometres southwest of Barnes railway station.

1.1.3 The proposals seek to change of use of the existing Grange building office (Class E) to residential (Class C3) under a Permitted Development (PD) application. A copy of the proposed site layout plans is attached at **Appendix A**.

1.1.4 Access to the site is currently provided from the north side of Bank Lane through a security controlled gated entranceway leading to a paved driveway with speedbumps. Bank Lane is accessible from Priory Lane at its eastern end, Roehampton Gate and Roedean Crescent to the south side, and leads to Palewell Playing Fields to the west.

1.1.5 This Travel Plan Statement outlines the opportunities for sustainable travel to and from the development, targeting residents of the site. It details specific measures and initiatives to be implemented with the aim of reducing reliance on the private car despite the local infrastructure, and achieving the targets specified, through the promotion of active travel modes (walking and cycling).

## 1.2 Why a Travel Plan Statement?

1.2.1 Due to the size of the residential development (48 dwellings) is such that is falls outside the Transport for London (TfL) guidelines for the production of a Travel Plan or a Travel Plan Statement. TfL's 'Guidance for residential travel planning in London' document stipulates the minimum threshold for requiring a Travel Plan as 80 residential units, and a Travel Plan Statement as 50 units.

1.2.2 The production of this Travel Plan Statement is considered appropriate despite falling under those requirements, in order to promote sustainable travel options to future residents of the site. It demonstrates the opportunities for sustainable travel to / from the site as well as highlighting the benefits a Travel Plan can bring.

1.2.3 The TfL website says the following with regards to Travel Plan Statements: "*It may not be appropriate to set specific targets within these plans. However, a set of positive measures promoting sustainable transport should be included, together with an action plan for their implementation.*"

1.2.4 It should be noted that a Travel Plan Coordinator (TPC) is not required as part of the process of a Travel Plan Statement, as the role of the TPC is to ensure implementation of measures, monitoring and review which is generally associated with the provision of a full Travel Plan. In this instance, the measures identified would be implemented and promoted to residents by the operator of the commercial unit prior to occupation of the development.

1.2.5 A Transport Statement has been prepared by RGP (Reference: 2026/9552/TS01) to support the planning application and describes the likely transport impact of the development proposals (including trip generation and parking demand) in detail.

## 1.3 Travel Planning Policy

1.3.1 The need to manage transport in new developments is embedded within national, regional and local policy, with the need to reduce car dependency, increase travel choices and encourage sustainable travel supported by the National Planning Policy Framework (NPPF, August 2026) which states at TR6: Assessing transport impacts that "*Development proposals that are likely to generate significant amounts of movement should be supported by: … b. A travel plan, which indicates how sustainable transport objectives will be delivered, monitored and managed over time.*"

1.3.2 Whilst this proposal does not generate 'significant' amounts of movement, this Travel Plan has been prepared nevertheless to reduce the impact of the development on the surrounding area and reflect the transport vision for the development.

1.3.3 Further to this, TR1: Vision-led approach to planning for transport acknowledges that an appropriate mix of uses minimises the number and length of journeys needed for employment, shopping, leisure, education and other activities and CC2: Mitigation of climate change refers to prioritising sustainable patterns of movement, with opportunities taken to improve walking, wheeling, cycling and public transport, and infrastructure provided to support the transition to zero-emission vehicles, where relevant to the proposal, in order to contribute to climate change mitigation and the transition to net zero.

1.3.4 The London Plan 2021, Para. 5.1.10 recognises the importance of shared use and co-location of social infrastructure in reducing the need to travel and improving accessibility, while Para. 10.4.3 suggests that the use of Travel Plans may help reduce the negative impact of development on the transport network and reduce potentially harmful public health benefits.

*1.3.5* The Mayor has a strategic target for 80 per cent of all trips in London to be made by foot, cycle or public transport by 2041. This Travel Plan Statement aims to support the achievement of the target. The key policies and strategies for transport are outlined in The Mayor's Transport Strategy. It recognises that "*commercial and residential development should be planned around good public transport access and well-connected town centres, so fewer people need to rely on cars.*"

1.3.6 This Travel Plan Statement has additionally been prepared with regard to relevant guidance and best practice, including Wandsworth Council's Local Plan, promoting the use of Travel Plans to "*encourage safe, healthy, and sustainable travel options*."

## 1.4 Travel Planning Benefits

1.4.1 Although a Travel Plan Statement is a more condensed document than a full Travel Plan, the key objectives and principles apply to both. This section outlines the purpose of providing Travel Planning for new developments and details the concepts of sustainable travel to be promoted to the future occupants of the site.

1.4.2 Travel Planning is a strategy through which journeys to and from a location are managed. It comprises a package of measures tailored to the needs of an individual site and aimed at promoting more sustainable travel (walking, cycling and public transport) and reducing reliance on the private car. The development of such measures can reduce the impact of travel and transport whilst also bringing a range of benefits to individuals and the local community, including reduced air pollution and use of fossil fuels.

1.4.3 For **residents** a Travel Plan can:

(i) Help provide less stressful options for travel, with the ability to socialise;

(ii) Present opportunities to build healthy exercise into daily life; and

(iii) Reduce the cost of travel.

1.4.4 For **developers**, a Travel Plan can:

(i) Satisfy local planning and highway authorities;

(ii) Improve corporate social responsibilities, above that of competitors;

(iii) Offer financial savings to the business, and;

(iv) Improve resident retention and morale.

1.4.5 For the **local community**, a Travel Plan can:

(i) Make local streets less congested, less dangerous, less noisy and less polluted;

(ii) Enhance public transport;

(iii) Improve the environment and the routes available for walking and cycling; and

(iv) Help create a place which is better to live in, work in and visit, which in turn can attract investment.

## 2 KEY AIMS OF THIS TRAVEL PLAN STATEMENT

2.1.1 This Travel Plan Statement identifies ways to promote more sustainable travel and to offer realistic transport choices for all journeys associated with the proposed development of the site. These include commuting trips by residents and journeys made by visitors.

2.1.2 The key aims of this Travel Plan Statement are to:

(v) Provide residents with greater information as to the alternative modes of travel available when travelling to and from the site;

(vi) Identify opportunities to provide new infrastructure to support sustainable modes of travel for residents;

(vii) Promote the use of alternative modes of travel; and

(viii) Support residents to achieve a shift in travel behaviour away from single occupancy car travel towards more sustainable modes of transport.

# 3 BASELINE CONDITIONS

## 3.1 Site Location and Local Highway Network

3.1.1 The site is located at The Grange, Bank Lane, a quiet street within Roehampton, southwest London. The site is located approximately 500 metres north of Richmond Park's Roehampton Gate, and 1.5 kilometres southwest of Barnes railway station. The location of the site is shown at **Figure 2.**

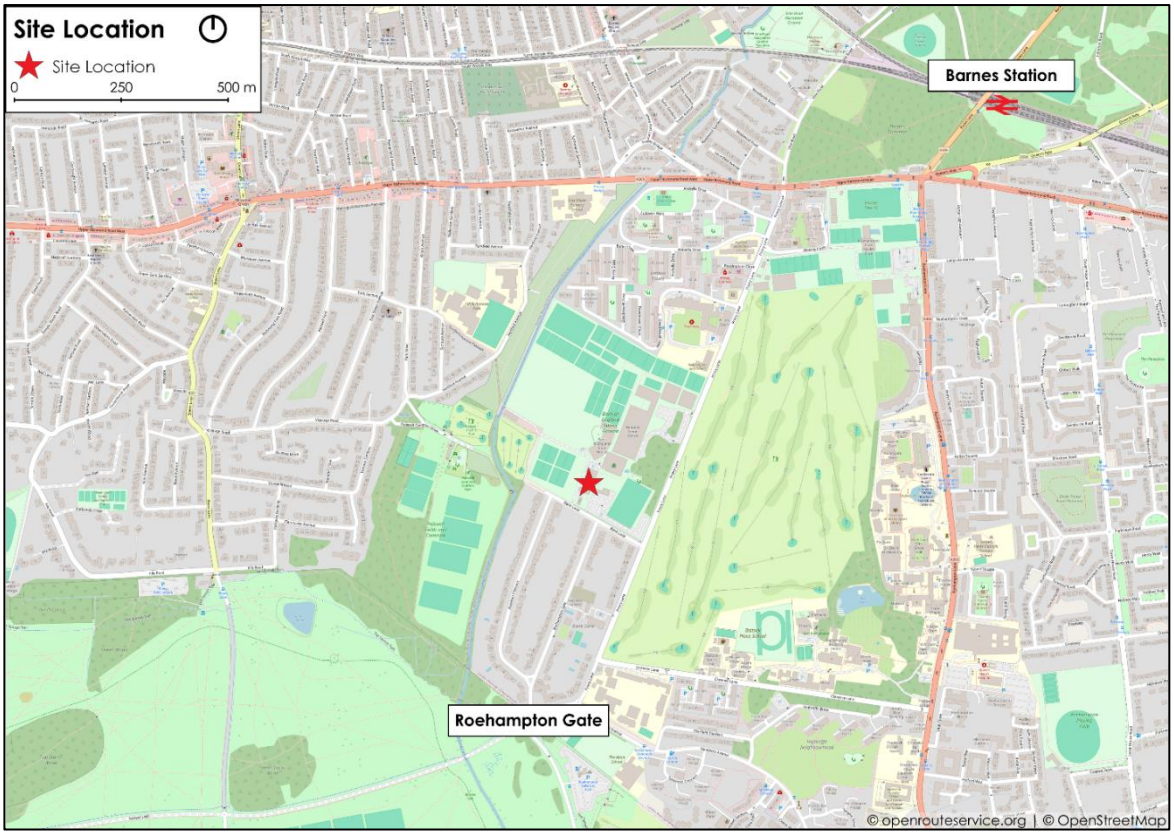



**Figure 1 Site Location**

3.1.2 **Figure 1** illustrates the site's location in the context of the nearest main station- Barnes Railway Station, at a 20 minute walk or 7 minute cycle away.

3.1.3 The site is located on the northern side of Bank Lane, a wide, sloping, residential, two-way road, served by way of a simple priority junctions at its eastern extent from Priory Lane. Additional access from the south side is from Roehampton Gate and Roedean Crescent, both joining and leading to Roehampton Gate. All roads are subject to a 20mph speed limit, have good street lighting provisions and are lined with mature trees.

3.1.4 Bank Lane, Roehampton Gate and Roedean Crescent sit outside of the Roehampton Controlled Parking Zone (CPZ), with on street parking on either side of the street, and on the surrounding streets.

# 4 ACCESSIBILITY CREDENTIALS

## 4.1 Overview

4.1.1 In accordance with relevant national (NPPF), regional (The London Plan) and local (Wandsworth Council transport planning policy) objectives, a review of the existing transport infrastructure and services within the vicinity of the site has been undertaken.

4.1.2 To establish the potential for people accessing the site by sustainable modes of travel, a review of the existing transport infrastructure and services in the vicinity of the site has been undertaken in accordance with relevant transport-planning policy objectives.

4.1.3 In addition, the travel and journey planning information at www.tfl.gov.uk/plan-a-journey/ will be promoted to residents wherever possible.

## 4.2 PTAL

4.2.1 Public Transport Accessibility Levels (PTALs) provide a guide to the relative accessibility of an area by public transport and range between 1a (worst) and 6b (best).

4.2.2 The site has a Public Transport Accessibility Level (PTAL) rating of 0 due to the distance to local public transport being beyond the PTAL calculation threshold distances (640m for bus stops and 960m for rail/LUL stations). An extract of the WebCAT PTAL map is provided at **Figure 2.**

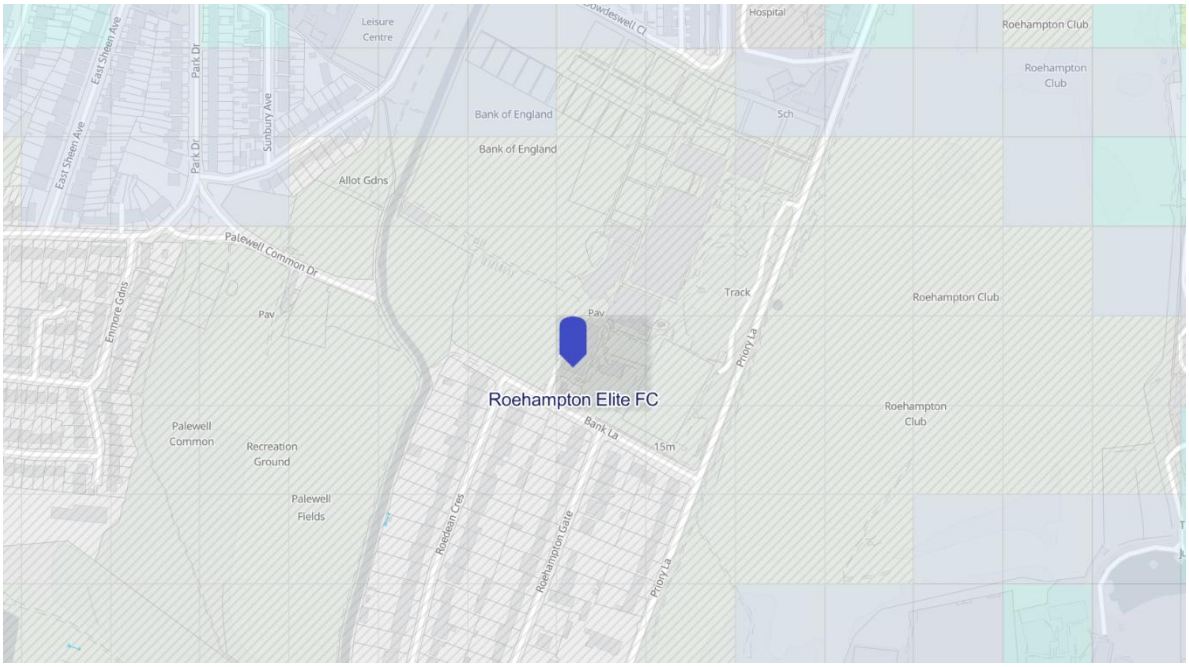



**Figure 2 WebCAT PTAL Map**

4.2.3 It is noteworthy that a PTAL rating of 3 and 4 (moderate public transport access) are located 400m and 500m respectively to the north of the site, demonstrating that good public transport options exist, but lie just beyond the PTAL catchment area of the site.

### 4.3 Sustainable Access Measure (SAM)

4.3.1 The Sustainable Access Measure (SAM) has been recently produced by TfL in order to provide a more accurate representation of site connectivity and is particularly referenced in the draft London Plan. As discussed above, PTAL is a *"measure of how long it takes to walk to and wait for public transport to 'access' the public transport network"*, though as continued in the SAM Methodology Summary Report (July 2026): *"SAM reflects whole journey times to various destinations and includes travel by walking."*

4.3.2 While PTAL and SAM use some of the same databases for information, SAM is more complex, measuring mainly the walkability of a location to local amenities, and via public transport to reach places of work. The SAM score for the site is 0 which reflects the site's label as Designated Open Space on Metropolitan land, thereby limiting its score value, however those grid squares closest to the site see a 3- or 4-point value from a ranking of 1 to 5b, highlighting the above average connectivity in the direct vicinity to city-wide destinations as part of multi modal journeys.

### 4.4 Census 2011 Journey to Work Analysis

4.4.1 As the site is not yet operational, the anticipated modal split for residents has been derived from 2011 Census data. Census Data (2011) Method of Travel to Work has been obtained for the E01004576: Wandsworth 013D, the Lower Layer Super Output Area (LSOA) which the site lies within. This information has been considered as shown in **Figure 3**. The full census journey to work data is appended at **Appendix B.**

| Mode | Daily Two-Way-Trips | Percentage (%) |
|---|---|---|
| Underground, metro, light rail, tram | 86 | 13% |
| Train | 88 | 14% |
| Bus, minibus or coach | 183 | 28% |
| Taxi | 3 | 0% |
| Motorcycle, scooter or moped | 11 | 2% |
| Driving a car or van | 163 | 25% |
| Passenger in a car or van | 13 | 2% |
| Bicycle | 38 | 6% |
| On foot | 60 | 9% |
| Total | 649 | 100% |

**Figure 3 Anticipated Mode Split (2011 Census Journey to Work Data – Resident Population)**

4.4.2 The census journey to work data indicates that only 27% of journeys to work are undertaken by car with 42% of trips made by public transport and a further 15% of trips made by active travel modes (walking and cycling). The census data demonstrates that the low PTAL of the site is not an overwhelming determinant in influencing the way in people travel from the site.

## 4.5 Walking

4.5.1 It is commonly accepted that walking and cycling can replace motorised transport for journeys of up to 2 kilometres and 5 kilometres respectively. These are considered the preferred maximum distances as outlined in the Chartered Institution of Highways and Transportation's (CIHT) Guidelines for Providing Journeys on Foot (2000).

4.5.2 Walking and cycling play a vital role in healthy and active lifestyles and if convenient and safe links are available, there is significant opportunity to reduce the need for local vehicle trips, thus reducing the traffic volumes on the surrounding highway network. The site is located near to access for the surrounding residential areas as well as local town centres.

4.5.3 Walking infrastructure in the local area is supported by footways and Public Right of Ways (PRoWs) which facilitate pedestrian movement without the presence of vehicles. The area lacks tactile paving in its residential portions, however, lighting, dropped kerbs, and maintained pavement is available in most of the region.

4.5.4 To assess the relative context for pedestrian movement to/from the site, the figure below illustrates an indicative walking catchment from the site, generated using GIS software which allows for a 15-minute walk at an average speed of 5km/h.

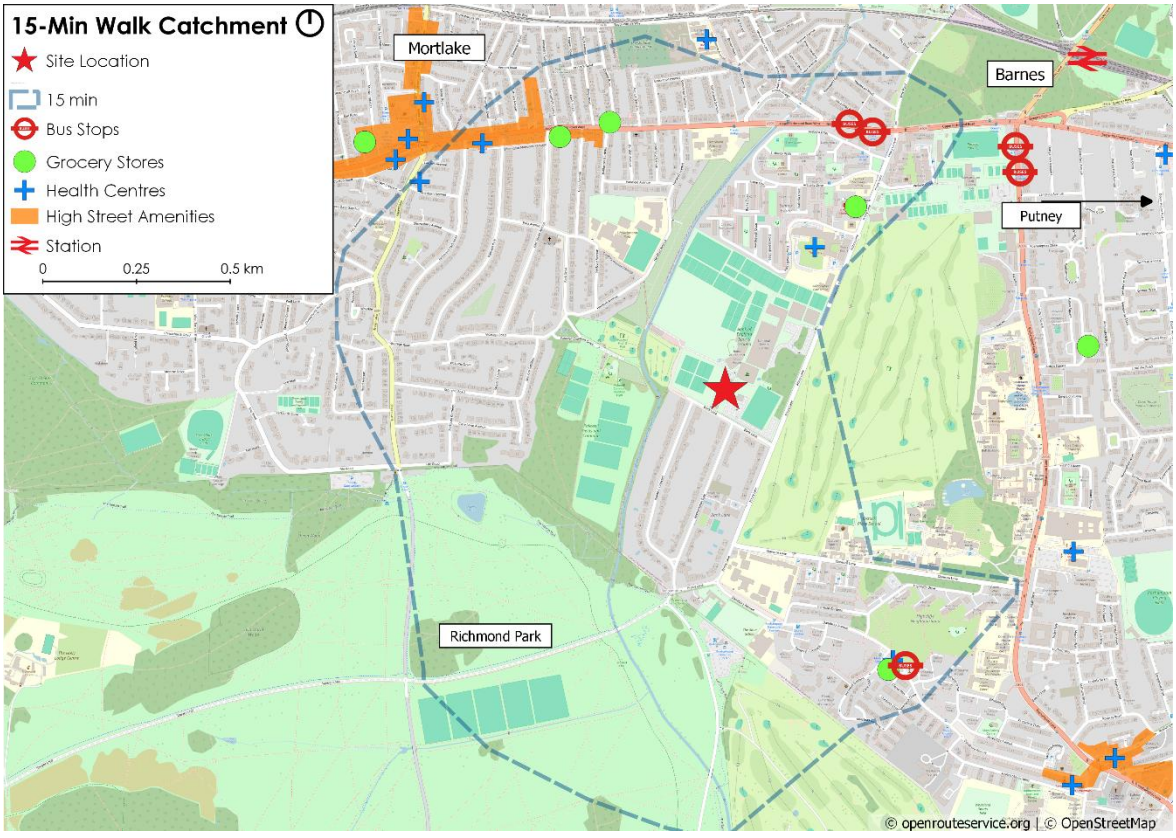



**Figure 4 Key Destinations within a 15-Minute Walk**

4.5.5 **Figure 4** shows that within a 15-minute walk of the site, many desirable locations may be reached, including but not limited to grocery shops, leisure and gym facilities, green space, education centres, health centres, and many more restaurants, pubs, cafes and the like located on Mortlake High Street to the northwest of the site.

4.5.6 The site is located within 500m of Richmond Park and would subsequently hold an appeal for future residents in terms of access to attractive amenity space for walking and cycling.

4.5.7 It is therefore considered that the site is well located in relation to amenities within a walking distance.

## 4.6 Cycling

4.6.1 Over short distances especially in urban areas, cycling is often quicker than using a car and more flexible than using public transport.

4.6.2 Specific cycle infrastructure can be seen in the shared pedestrian and cycle path on the western side of the site, forming part of National Cycle Network Route 4, a long-distance route between London and Fishguard via Reading, Bath, Bristol, Newport, Swansea, Tenby, Haverfordwest and St. Davids. Locally it leads through Richmond Park to Ham and then Kingston to the south, and along the north of the Thames. This route and others can be found on the Wandsworth Council website here: www.wandsworth.gov.uk/roads-and-transport/transport/walking-cycling/cycling/cycle-routes/.

4.6.3 The local streets are also considered to be conducive to cycling, given their low speed and flat topography, supporting journeys on foot or cycle within the region. There is a shared pedestrian/cycleway present on the western side of Priory Lane. The cycleway measures approximately 3.5m in width and provides cyclists with the option of utilising this off-carriageway cycle lane or cycling within the carriageway.

4.6.4 Public bike stands are present at the Barnes Railway Station with sheltered and secure features, as well as informal cycle stands for bike hire schemes, located along Bank Lane as photograph image in **Figure 5.**




**Figure 5** **E-bike and E-scooter Docking Parking Area – Bank Lane**

4.6.5 **Figure 6** shows those areas and facilities within a 15-minute cycle of the site location, assuming a 18kmph cycling speed, which demonstrate the site's connectedness to the surrounding area by cycle.

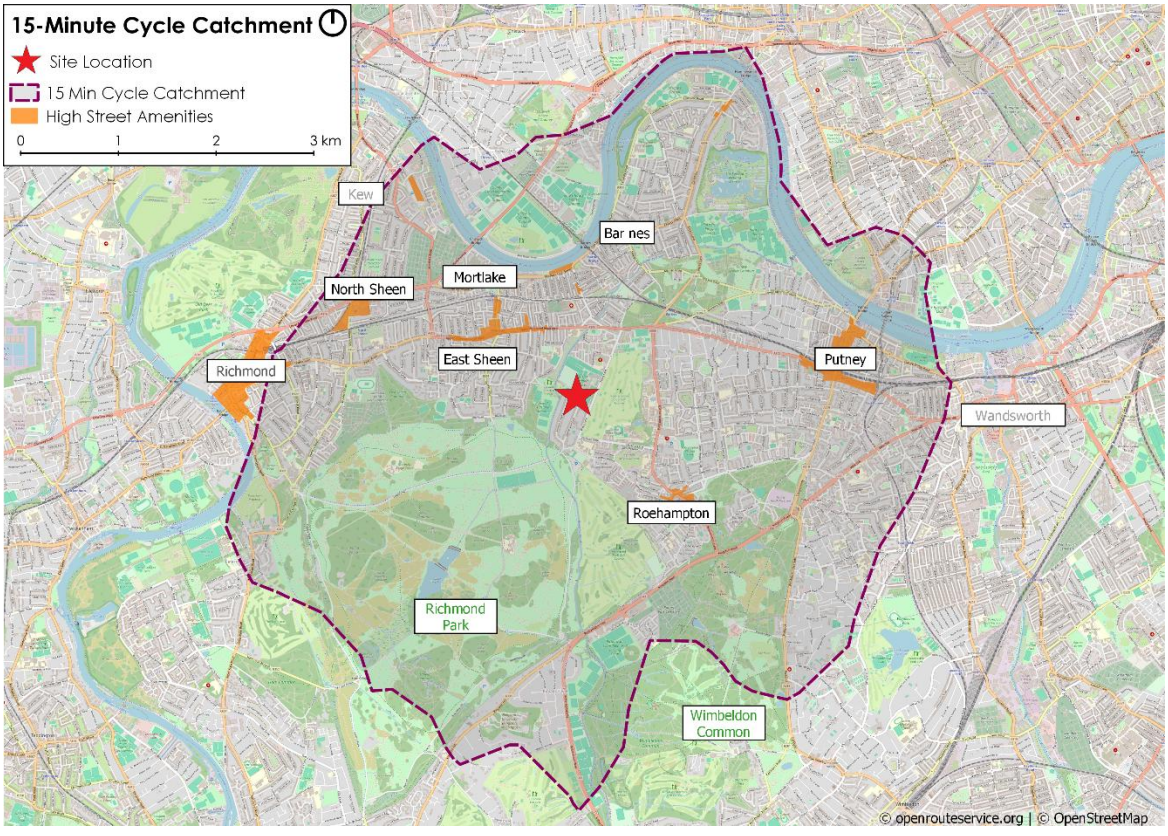


**Figure 6 Local Centres within a 15-Minute Cycle**

4.6.6 Many local high streets exist within the above 15-minute cycle catchment, all of which contain shopping centres of various sizes, restaurants, pubs, clubs, cafes, and more.

4.6.7 In terms of amenities accessible by cycle, this site is well served. It is therefore considered that there are realistic opportunities for residents of the flats to travel to / from the site by active modes (walking/cycling).

## 4.7 Micromobility

4.7.1 The main cycle hire schemes in the area are Lime / Uber (www.li.me/locations/london) and Forest Bikes (www.forest.bike), which operate at similar costs with pay-as-you-go or subscription payment options.

4.7.2 Within town centres in Wandsworth, cycle hire users are only allowed to leave their hired bikes in designated cycle parking bays (or station cycle parking), which are denoted on app interfaces, as well as on the Wandsworth Council website, which can be seen in the screengrab below and via this website link: www.wandsworth.gov.uk/roads-and-transport/transport/walking-cycling/cycling/dockless-hire-e-bikes-and-e-scooters/#Dedicated_parking_bays.

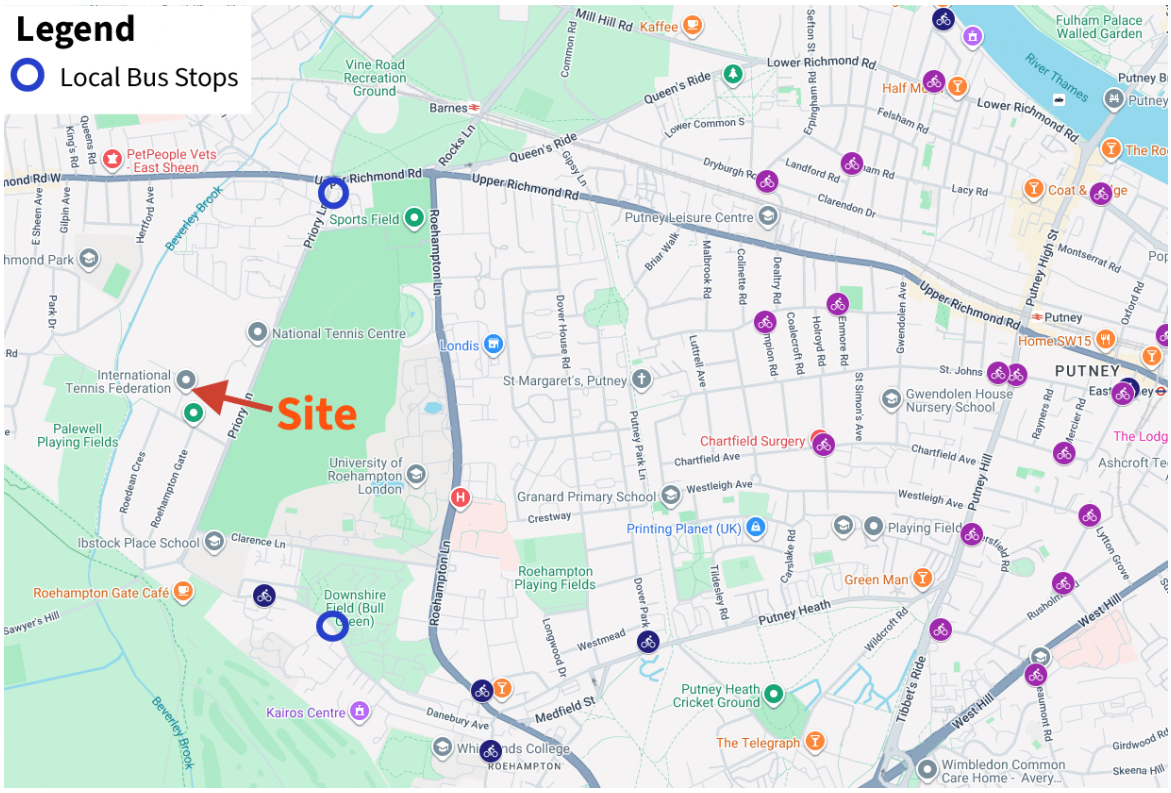



**Figure 7 Designated Cycle-Hire Parking Bays**

4.7.3 **Figure 7** shows the parking bays nearby (though does not show the station and adjacent to site parking locations)

4.7.4 However, outside of these town-centres bikes may be parked in an organised fashion to the side of the footway and off of main roads, as indicated in cycle hire parking user agreements, with instructions detailed here: www.li.me/en-gb/london-parking.

4.7.5 An example of a typical cycle journey from the site would involve a resident hiring a Lime or Forest cycle from the cycle parking location in **Figure 5** and cycling to Barnes Rail Station via the shared pedestrian/cycleway on Priory Lane. Upon reaching the station the resident would be able to leave the hired cycle at the station associated cycle stands and continue onward journey via National Rail services.

4.7.6 Another alternative is the ownership of a Brompton Bike, which folds up and allows users to take cycles onto buses, trains, and underground services to increase the ability to cycle on either end of a multi-modal journey.

### 4.8 Bus Services

4.8.1 The site has a number of bus stops located within a 15-minute walk at Priory Lane (Stops D and N) (Upper Richmond Road) and Danebury Avenue/Minstead Gardens, as well as the bus stops at Rosslyn Park Rugby Football Club (Stops P and S) on Roehampton Lane. These stops benefit from shelters, seating, and real-time passenger information.

| Service | Route | Most Local Stop to Bank Lane | Typical Daytime Frequency | Typical Hours of Weekday Operation |
|---|---|---|---|---|
| 337 | Richmond Bus Station – East Sheen – Barnes – Putney – Wandsworth – Clapham Junction | Priory Lane | Roughly every 13-15 minutes | Approx. 05:25 – 00:40 |
| 33 | Fulwell – Teddington – Twickenham – Richmond – Barnes – Hammersmith – Kensington | Priory Lane | Roughly every 10 minutes at peak | Approx. 05:00 – 00:30 |
| 493 | Tooting, St George's Hospital – Wimbledon – Southfields – Roehampton – Richmond | Priory Lane | Roughly every 10-15 minutes | Approx. 05:33 – 00:57 |
| 430 | Roehampton, Danebury Avenue – Putney – Fulham – West Brompton – South Kensington | Danebury Avenue | Classed as high-frequency, roughly every 8-10 minutes | Approx. 05:30 – 00:30 |
| 170 | Roehampton, Danebury Avenue – Putney Heath – Wandsworth – Clapham Junction – Battersea – Victoria | Danebury Avenue | Scheduled roughly every 10 minutes | Approx. 05:00 – 00:30 |
| 265 | Putney Bridge – Putney Common – Roehampton – Kingston Vale – New Malden – Tolworth | Rosslyn Park | Every 5-6 minutes at peak | Approx. 05:30 – 00:30 |
| 493 | Tooting, St George's Hospital – Wimbledon – Southfields – Roehampton – Richmond | Rosslyn Park | Roughly every 10-15 minutes | Approx. 05:33 – 00:57 |

| | | | | |
|---|---|---|---|---|
| 419 | Richmond – Mortlake – Barnes Bridge – Castelnau – Barnes Station – Roehampton, Bessborough Road | Rosslyn Park | Roughly every 15-20 minutes | Approx. 06:14 – 01:22 |

**Figure 8 Summary of Local Bus Services**

4.8.2 The Priory Lane bus stops have busses running between Richmond/Fulwell and Clapham Junction, Barnes and Tooting. Danebury Avenue provides services to Victoria and South Kensington. Rosslyn Park serves Putney Bridge, Richmond, Tolworth, Tooting and Roehampton.

4.8.3 The above summary confirms that the local area benefits from a number of services operated by TfL, providing regular services to key destinations, including the N74 running overnight to facilitate safe night travel in the local area.

4.8.4 A bus route map and further timetables, route maps, and fare information can be found at: https://www.traveline.info/ and www.tfl.gov.uk/modes/buses.

### 4.9 Rail / Underground Services

4.9.1 Barnes Railway Station is located approximately 1.5km to the north of the site and can be reached in 20 minutes on-foot, and 7 minutes by bike. The station lies on the Waterloo Reading line, and services depart regularly to Waterloo, Weybridge, Kingston, and Chiswick.

4.9.2 There are 92 sheltered cycle storage spaces covered by CCTV are available at the station.

4.9.3 The nearest London Underground station is East Putney, serviced by the District Line with services to Wimbledon, Edgeware Road and Upminster. The station is located 4km from the site, within a 15-minute cycle, and is serviced by the 337-bus eastbound from Priory Lane Stop D.

4.9.4 East Putney Station features cycle parking and nearby amenities on the local high street, with District Line services to Wimbledon to the south, and Edgeware Road and Tower Hill to the northeast, with services running every 3-20 minutes.

4.9.5 Richmond Station has similar cycle parking and town centre amenities, where the Mildmay Line runs every 15 minutes to Stratford, the District Line to Dagenham East and Upminster every 10-15 minutes, and National Rail services. The station is located 30 minutes away by public transport and 13 minutes by cycle.

4.9.6 On the basis of the above, it is apparent that rail travel to / from the site is an attractive option.

4.9.7 Further information including live arrival/departure information, details of fares and station facilities can be obtained from: www.nationalrail.co.uk / https://tfl.gov.uk/maps/track/tube.

### 4.10 Multi-Modal Complete Journey Trips

4.10.1 To better understand the accessibility of the site via access to public transport, the following section describes a few likely complete trips- journeys from trip start to trip end- to take place from the site which may make use of multiple modes of transport.

| Micro-travel | Service | Destination | Macro-travel | Complete Journey Time |
|---|---|---|---|---|
| 15-minute walk | Bus 33 / 337 / 493 | Richmond | 17 min | 32 minutes |
| | Bus 337 | Putney | 17 min | 32 minutes |
| | Bus 337 | Wandsworth | 23 min | 38 minutes |
| | Bus 170 | Clapham Junction | 30 min | 45 minutes |
| | Bus 493 | Wimbledon | 33 min | 48 minutes |
| 25-minute walk / 7-minute cycle | Rail Barnes St. | Richmond | 6 min | 31 / 13 minutes |
| | Rail Barnes St. | Clapham Junction | 9 min | 34 / 16 minutes |
| | Rail Barnes St. | London Waterloo | 20 min | 45 / 27 minutes |
| | Rail Barnes St. | London Victoria | 25 min | 50 / 32 minutes |
| 35-minute walk & bus / 35-minute walk & train / 18-minute cycle | Underground East Putney St. | Wimbledon | 9 min | 21/ minutes |
| | Underground East Putney St. | St Pancras International | 34 min | 69 / 42 minutes |
| | Underground East Putney St. | Canary Wharf | 45 min | 80 / 63 minutes |
| 30-minute walk & bus / 30-minute walk & train / 13-minute cycle | Underground Richmond St. | Wilsden Junction | 32 min | 62 / 45 minutes |
| | Underground Richmond St. | Wembley Central | 45 min | 75 / 58 minutes |

**Figure 9 Multi-Modal Complete Journey Trips from the site**

4.10.2 **Figure 9** demonstrates connectivity which neither PTAL nor SAM were able to capture and quantify when considering active travel routes including walking and cycling.

4.10.3 Walking and cycling routes to and from these key transport connection locations are as follows:

(i) To northern bus stops (onward travel to Richmond, Putney, and Wandsworth) there exists a separate footway and cycleway marked out on the footway / pavement above vehicle level for the entire extent of the journey to the bus stops.

(ii) To southern bus stops (onward travel to Wimbledon and Clapham Junction) much of the journey is through residential areas, with lower speed limits of 20 mph. Encouraging both pedestrian and bicycle travel.

(iii) To Barnes Rail station (onward travel to Richmond and London Waterloo) pedestrians and cyclists would use Priory lane for the majority of the journey. Priory Lane benefits from a shared pedestrian and cycle path before utilising Vine Road or Barnes Common paths to arrive at the station.

(iv) To reach East Putney Underground Station (onward travel to Wimbledon, Canary Wharf, and St. Pancras) cyclists are likely to use Priory Road and Upper Richmond Road that both benefit from cycle paths in both directions, therefore encouraging using a bicycle as part of a multi-modal journey.

(v) Cycle access to Richmond Underground Station is available via Palewell Common Drive and a network of mainly residential roads. These roads are subject to a signposted 20mph speed limit and generally experience low traffic flows, providing a suitable and viable route for cyclists.

### 4.11 Car Clubs

4.11.1 Following a decision by ZipCar to cease operations within London in December 2025, there is a lack of car club vehicles operating within a 3km walk distance of the site. As such, it is not presently considered that Car Club Membership for new residents of the development would be appropriate or offer a practical alternative solution to car ownership.

4.11.2 Due to the residential aspect of the development, it is also possible for residents to take part in informal or formal car sharing in order to reduce their dependence on vehicle ownership.

4.11.3 The proposed Sustainable Transport Strategy subsequently focuses on encouraging trips by active travel (walking and cycling), micromobility (the use of e-scooter and e-bike hire schemes) and car sharing.

### 4.12 Taxi / Uber

4.12.1 It is anticipated that some trips to / from the site may be made by taxi, especially by those with disabilities and/or carrying heavy items. The site layout is such that taxi drop-off/pick-up can be accommodated within the on-site car parking area or at the front of the site access road.

### 4.13 Summary of Accessibility Credentials

4.13.1 The site is located on Bank Lane in Roehampton and benefits from good connectivity to the surrounding area by walking, cycling, public transport and multi-modal journeys. The site has a PTAL rating of 0, however, this reflects the distance from the site to the nearest qualifying public transport services (as per the PTAL distance thresholds), rather than a lack of transport options in the wider area, with higher PTAL-rated areas located nearby.

4.13.2 The site is within walking and cycling distance of a range of local amenities, Richmond Park, Barnes Railway Station and numerous bus services. Existing walking and cycling infrastructure, together with cycle hire and other micromobility options, provides realistic opportunities for residents to travel by sustainable modes. The proposed Sustainable Transport Strategy for the site would therefore focus on promoting walking, cycling, public transport, micromobility and car sharing, with the aim of reducing reliance on private car travel.

# 5 DEVELOPMENT PROPOSALS

## 5.1 Overview

5.1.1 The proposed development is for the change of use of the existing Grange office building (Class E) to residential use (Class C3) under a Class MA Permitted Development (PD) application.

5.1.2 The Grange building is arranged over five storeys (ground to 4th floor including a basement level) and is currently let out as office floorspace. The combined floor area is circa 3,977 sqm. There are two main parking areas associated with the wider site which are understood to provide a combined 130 parking spaces.

5.1.3 The development proposals would seek to convert the office floorspace to 48 residential apartment units. The proposed unit mix is as follows:

- 5 x studio units;
- 17 x 1bed/2-person units;
- 19 x 2bed/4-person units; and
- 7 x 3bed/6-person units.

## 5.2 Access

5.2.1 The access arrangements will continue as existing with residents accessing the car parking area to the south of the site as presented in **Figure 10**.



**Figure 10 Existing Access**

5.2.2 The access is managed by AELTC security and monitored 24 hours a day. Residents will be allocated passes allowing both pedestrian and vehicular access through the security area.

### 5.3 Census Car Ownership Analysis

5.3.1 Based upon a PTAL rating of 0, the London Plan permits parking at a ratio of up to 0.75 spaces per residential unit for sites located in inner-London. In order to identify the anticipated parking demand associated with the proposed development, a review of Census 2021 car ownership data has been undertaken and appended hereto in **Appendix C**.

5.3.2 Applying the RM001 - Accommodation type by car or van availability by number of usual residents aged 17 years or over in household criteria for the E02000935: Wandsworth 013 MSOA for flats, indicates the following:

- One usual resident over 17 years old = 0.317 vehicles per household; and
- Two or more usual residents over 17 years old = 0.767 vehicles per household.

5.3.3 Based upon the housing mix, the following average flat occupancy levels have been assumed:

- Studio flats – one person (over 17);
- 1b2p flats – 1.5 people (over 17) on average;
- 2 and 3-bed units = 2+ people over 17.

5.3.4 With respect to the one-bed flats, the assumption is that approximately 50% would be occupied by single adults and 50% would be occupied by couples. Th resulting anticipated level of car ownership associated with the 48 residential units is presented in **Figure 11.**

| Unit Size | Number of Units | Typical Car Ownership/Unit | Estimated Parking Demand |
|---|---|---|---|
| Studio | 5 | 0.317 | 2 |
| 1b2p | 17 | 0.476 | 8 |
| 2bed+ | 26 | 0.767 | 20 |
| **Total** | 48 | - | 30 |

**Figure 11 Anticipated Car Ownership and Parking Demand**

5.3.5 Applying the census-based car ownership analysis to the proposed accommodation schedule results in an estimated 30 vehicles owned by the residents of the 48 residential units. This demonstrates that the proposed 36 spaces would provide adequate parking provision for both residents and visitors of the development.

## 5.4 Car Parking Provision

5.4.1 The proposed parking provision is in line with the London Plan guidance and will include 36 assigned car parking spaces to the proposed dwellings. A legal agreement will be implemented similar to the previous arrangement where the 36 spaces will be allocated to residents only. This will be managed internally by property management to ensure that residents will only park within allocated car parking spaces.

5.4.2 The legal agreement demising the parking spaces to residents would be broadly set out as per the existing lease agreements as follows:

*"Use of the thirty six Car Spaces exclusively allocated to the Tenant as shown edged orange and blue as on Plan 9552 TGL-RGP-XX-XX-DR-T-001 in the position or positions in the Car Park from time to time allocated by the Landlord for the parking only of private motor cars belonging to the Tenant and lawful occupiers of the Demised Premises and their respective servants, agents and visitors but without any obligation on the Landlord to ensure that the same are unoccupied or available for use."*

5.4.3 Given the Permitted Development nature of the redevelopment, no external works to the existing car parking arrangement is proposed other than the marking out of disabled/Blue Badge parking spaces and delineating the spaces proposed to be allocated for the dole use of the residents/visitors of the residential units as shown in drawing **TGL-RGP-XX-XX-DR-T-001.**

## 5.5 Proposed Cycle Parking Provision

5.5.1 The cycle parking standards outlined within the London Plan have been used to establish an appropriate level of cycle parking, as summarised in **Figure 12.**

| Use Class | | Long-stay (e.g. for residents or employees) | Short-Stay (visitors or customers |
|---|---|---|---|
| C3-C4 | Dwellings (all) | • 1 space per studio or 1 person 1 bedroom dwelling<br>• 1.5 spaces per 2 person 1 bedroom dwelling<br>• 2 spaces per all other dwellings | 5 to 40 dwellings: 2 spaces |

**Figure 12 London Plan Cycle Standards**

5.5.2 Applying the above minimum parking standards would equate to a requirement for 83 long stay cycle spaces.

5.5.3 The GLA has recently published new draft London Plan Guidance, which will remain in place until 31 March 2028 or until the adoption of the next London Plan. Overall, the guidance relaxes the minimum cycle parking standards for residential developments. Applying these standards would require a total of 64 cycle parking spaces.

5.5.4 A total of 64 cycle parking spaces would be provided at ground-floor level on the eastern side of the development, adjacent to the bin store.

5.5.5 As noted in **Section 3**, an e-bike and e-scooter docking and parking area is located on Bank Lane, adjacent to the access.

## 5.6 Delivery Arrangements

5.6.1 Residential units typically generate ad hoc deliveries, including general postal services and online retail deliveries, which are usually undertaken by transit-type vans. Deliveries typically take up to five minutes to complete and could be accommodated within the parking area.

5.6.2 It is noted that a fire tender, or similar sized vehicle can manoeuvre within the parking area of the site, as demonstrated in drawing **TGL-RGP-XX-XX-DR-T-002**. The analysis therefore proves that the proposed development provides appropriate emergency vehicle access in accordance with Approved Document B (Requirement B5) relating to access and facilities for the Fire Service, supporting safe operation of the residential development in the event of an emergency.

## 5.7 Servicing Arrangements

5.7.1 Refuse collection is expected to route into the site before aligning adjacent to the residential units and collecting bins from the proposed bin store. The refuse vehicle will then manoeuvre within the site boundary and egress onto Bank Lane. This arrangement is illustrated within drawing **TGL-RGP-XX-XX-DR-T-003** attached hereto.

5.7.2 Collection frequency would reflect local arrangements for neighbouring residential properties.

## 5.8 Development Proposals Summary

5.8.1 The proposed development would convert the existing 3,977 sqm Grange office building to 48 residential units, comprising studios, one, two and three-bedroom apartments. The existing site access arrangements would be retained, with residents provided with controlled pedestrian, cycle and vehicular access to the existing parking area.

5.8.2 Based on local Census 2021 car ownership data and the proposed dwelling mix, an estimated parking demand of approximately 30 vehicles is anticipated. The provision of 36 allocated residential parking spaces would therefore accommodate the forecast demand, including provision for visitors. Cycle parking would also be provided, with 63 spaces proposed at ground-floor level, alongside access to nearby e-bike and e-scooter facilities.

5.8.3 Existing site arrangements would accommodate deliveries, emergency vehicle access and refuse collection without the need for significant external works. The proposals would therefore utilise the existing site infrastructure while providing appropriate parking, cycle parking, servicing and access arrangements for the proposed residential use.

# 6 AIMS, OBJECTIVES AND TARGETS

## 6.1 Aims and Objectives

6.1.1 It is now widely accepted that it is not possible to build our way out of congestion. Instead, the approach has to be to reduce the need to travel by increasing travel choice and awareness, therefore the overall aim of this Travel Plan Statement is:

***To reduce reliance upon the private car, by effecting a change in attitude to travel by increasing awareness of sustainable travel modes and their associated benefits.***

6.1.2 To achieve this aim, objectives should be provided that reflect the challenges of the site and focus the role of the Travel Plan. These objectives also support both the Mayor's Transport Strategy and the Local Authority's policy aims. For the development site, the objectives are:

***Objective 1 – Promote and actively encourage sustainable travel to and from the site***

***Objective 2 - Provide the on-site infrastructure to facilitate sustainable travel***

6.1.3 Furthermore, given the site's accessibility to public transport services and the current uptake of these, this Travel Plan Statement is additionally focussed on achieving a shift away from overcrowded public transport services, towards active modes.

# 7 MEASURES AND INITIATIVES

## 7.1 Implementations

7.1.1 An Action Plan outlining the proposed Travel Plan measures and actions identified for the site, along with responsibilities, estimated costs and implementation timescales is attached at **Appendix D**.

7.1.2 The Action Plan also pinpoints the objective that each measure will support to ensure that any initiative is targeted to achieving the overall aim for this site.

7.1.3 A combination of 'hard' infrastructural and 'soft' information-led measures is necessary to encourage residents and visitors of the site to switch their travel mode. The following measures will be undertaken in advance of the completion of site works so that facilities and information are in place as early as possible.

7.1.4 The Action Plan includes the following measures:

***Objective 1 - Promote and actively encourage sustainable travel to and from the site***

- Promotion of nearby facilities
- Bicycle Purchase Scheme
- Local Cycle Shop Discounts
- Bicycle maintenance
- Public transport information
- Public transport discounts
- Promotion of health, fitness and travel apps
- Promotion of car sharing
- Provision of website information
- Social media promotion
- Promote Travel Plan in Sales Literature
- Provision of Resident Welcome Pack
- Organisation of Travel Planning Events

***Objective 2 - Provide the on-site infrastructure to facilitate sustainable travel***

- Broadband Internet Connection
- Infrastructure Improvements

- Electric Vehicle Charging Points (EVCPs)
- Travel Noticeboard
- Cycle Parking

## 7.2 Effectiveness of Travel Plan Measures

7.2.1 The specified measures and initiatives should act to achieve the overall aim of the Travel Plan, consequently increasing the use of sustainable modes and reducing single-occupancy vehicle trips.

**RGP** - Transport Planning and Infrastructure Design Consultants enquiries@rgp.co.uk www.rgp.co.uk

**Surrey Office** Shackleford Suite, Mill Pool House, Godalming, Surrey GU7 1EY T: 01483 861 681
**London Office** 10 York Road, London SE1 7ND T: 020 7078 9662

RGP Consulting Engineers Limited • Registered on England No. 4237910 • Registered Office: Mill Pool House, Mill Lane, Godalming, Surrey GU7 1EY • Vat Registration No. 771 9281 04

# DRAWINGS




© Crown copyright and database rights 2025. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. RGP Ordnance Survey licence number: 100037123.

## Notes:

1. Do not scale from this drawing.
2. All dimensions are in metres unless noted otherwise.
3. All levels are in metres above ordnance datum (AOD).
4. This drawing should be printed in colour.
5. This drawing is to be read in conjunction with all other engineer's drawings.

Standard spaces

Disabled spaces

**Total spaces = 36**

| Rev | Details | Date | By | Chkd | Appd |
|---|---|---|---|---|---|
| P01 | First Issue | 08.09.26 | GE | CS | CS |

Godalming Office
Old Mill Studios, Fry's Yard,
37-40 Bridge Street, Godalming
GU7 1HP

T: 01483 861 681
E: enquiries@rgp.co.uk
www.rgp.co.uk

Transport Planning and Infrastructure Design Consultants

Status: INFORMATION


Client: Bank of England

Project: The Grange, Bank Lane, Roehampton


Drawing Title: Parking Allocation Plan

| Scale @ A3: | Date: | Drawn: | Designed: | Checked: | Approved: |
|---|---|---|---|---|---|
| 1:250 | 08.09.26 | GE | GE | CS | CS |

| Project No: | Drawing No: | Revision: |
|---|---|---|
| 9552 | TGL-RGP-XX-XX-DR-T-001 | P01 |

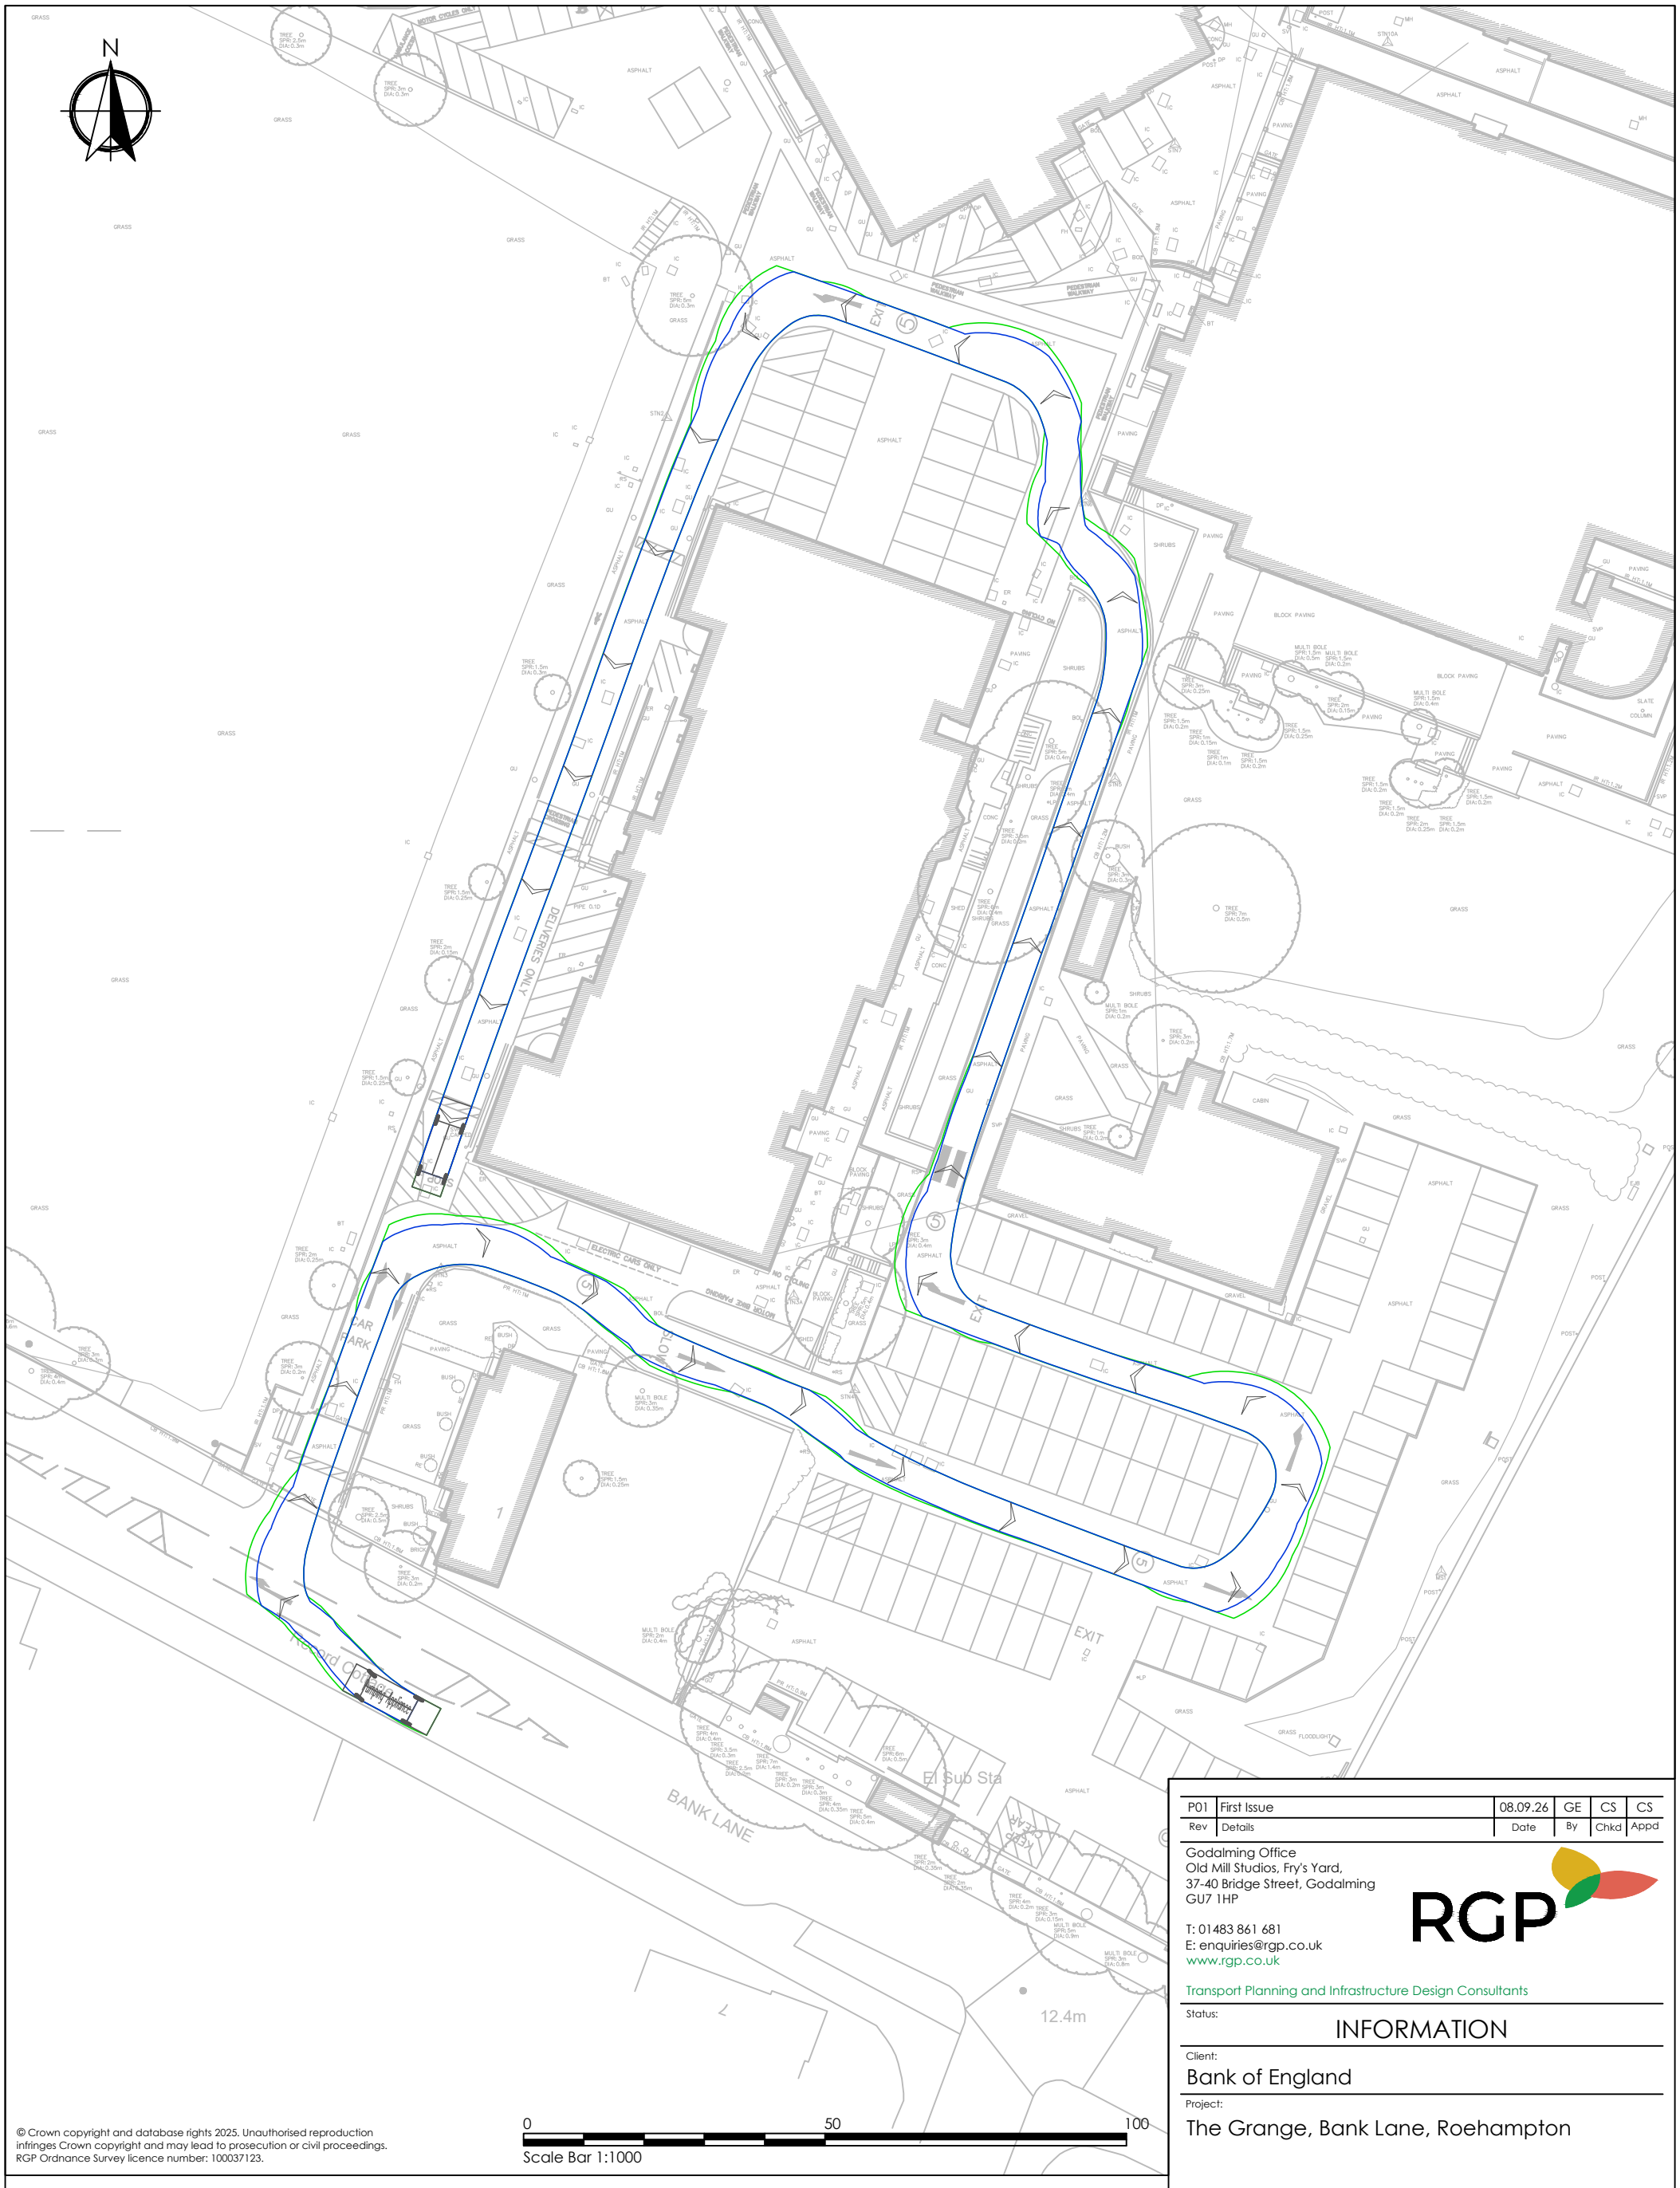


© Crown copyright and database rights 2025. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. RGP Ordnance Survey licence number: 100037123.




| Pumping Appliance | |
|---|---|
| Overall Length | 7.900m |
| Overall Width | 2.500m |
| Overall Body Height | 3.300m |
| Min Body Ground Clearance | 0.140m |
| Track Width | 2.500m |
| Lock to lock time | 4.00s |
| Kerb to Kerb Turning Radius | 7.750m |

## Notes:

1. Do not scale from this drawing.
2. All dimensions are in metres unless noted otherwise.
3. All levels are in metres above ordnance datum (AOD).
4. This drawing should be printed in colour.
5. This drawing is to be read in conjunction with all other engineer's drawings.

| Rev | Details | Date | By | Chkd | Appd |
|---|---|---|---|---|---|
| P01 | First Issue | 08.09.26 | GE | CS | CS |

Godalming Office
Old Mill Studios, Fry's Yard,
37-40 Bridge Street, Godalming
GU7 1HP

T: 01483 861 681
E: enquiries@rgp.co.uk
www.rgp.co.uk

Transport Planning and Infrastructure Design Consultants

Status: INFORMATION

Client: Bank of England


Project: The Grange, Bank Lane, Roehampton

Drawing Title: Swept Path Assessment
Fire Tender


| Scale @ A3: | Date: | Drawn: | Designed: | Checked: | Approved: |
|---|---|---|---|---|---|
| 1:500 | 08.09.26 | GE | GE | CS | CS |

| Project No: | Drawing No: | Revision: |
|---|---|---|
| 9552 | TGL-RGP-XX-XX-DR-T-002 | P01 |

## Vehicle Inbound

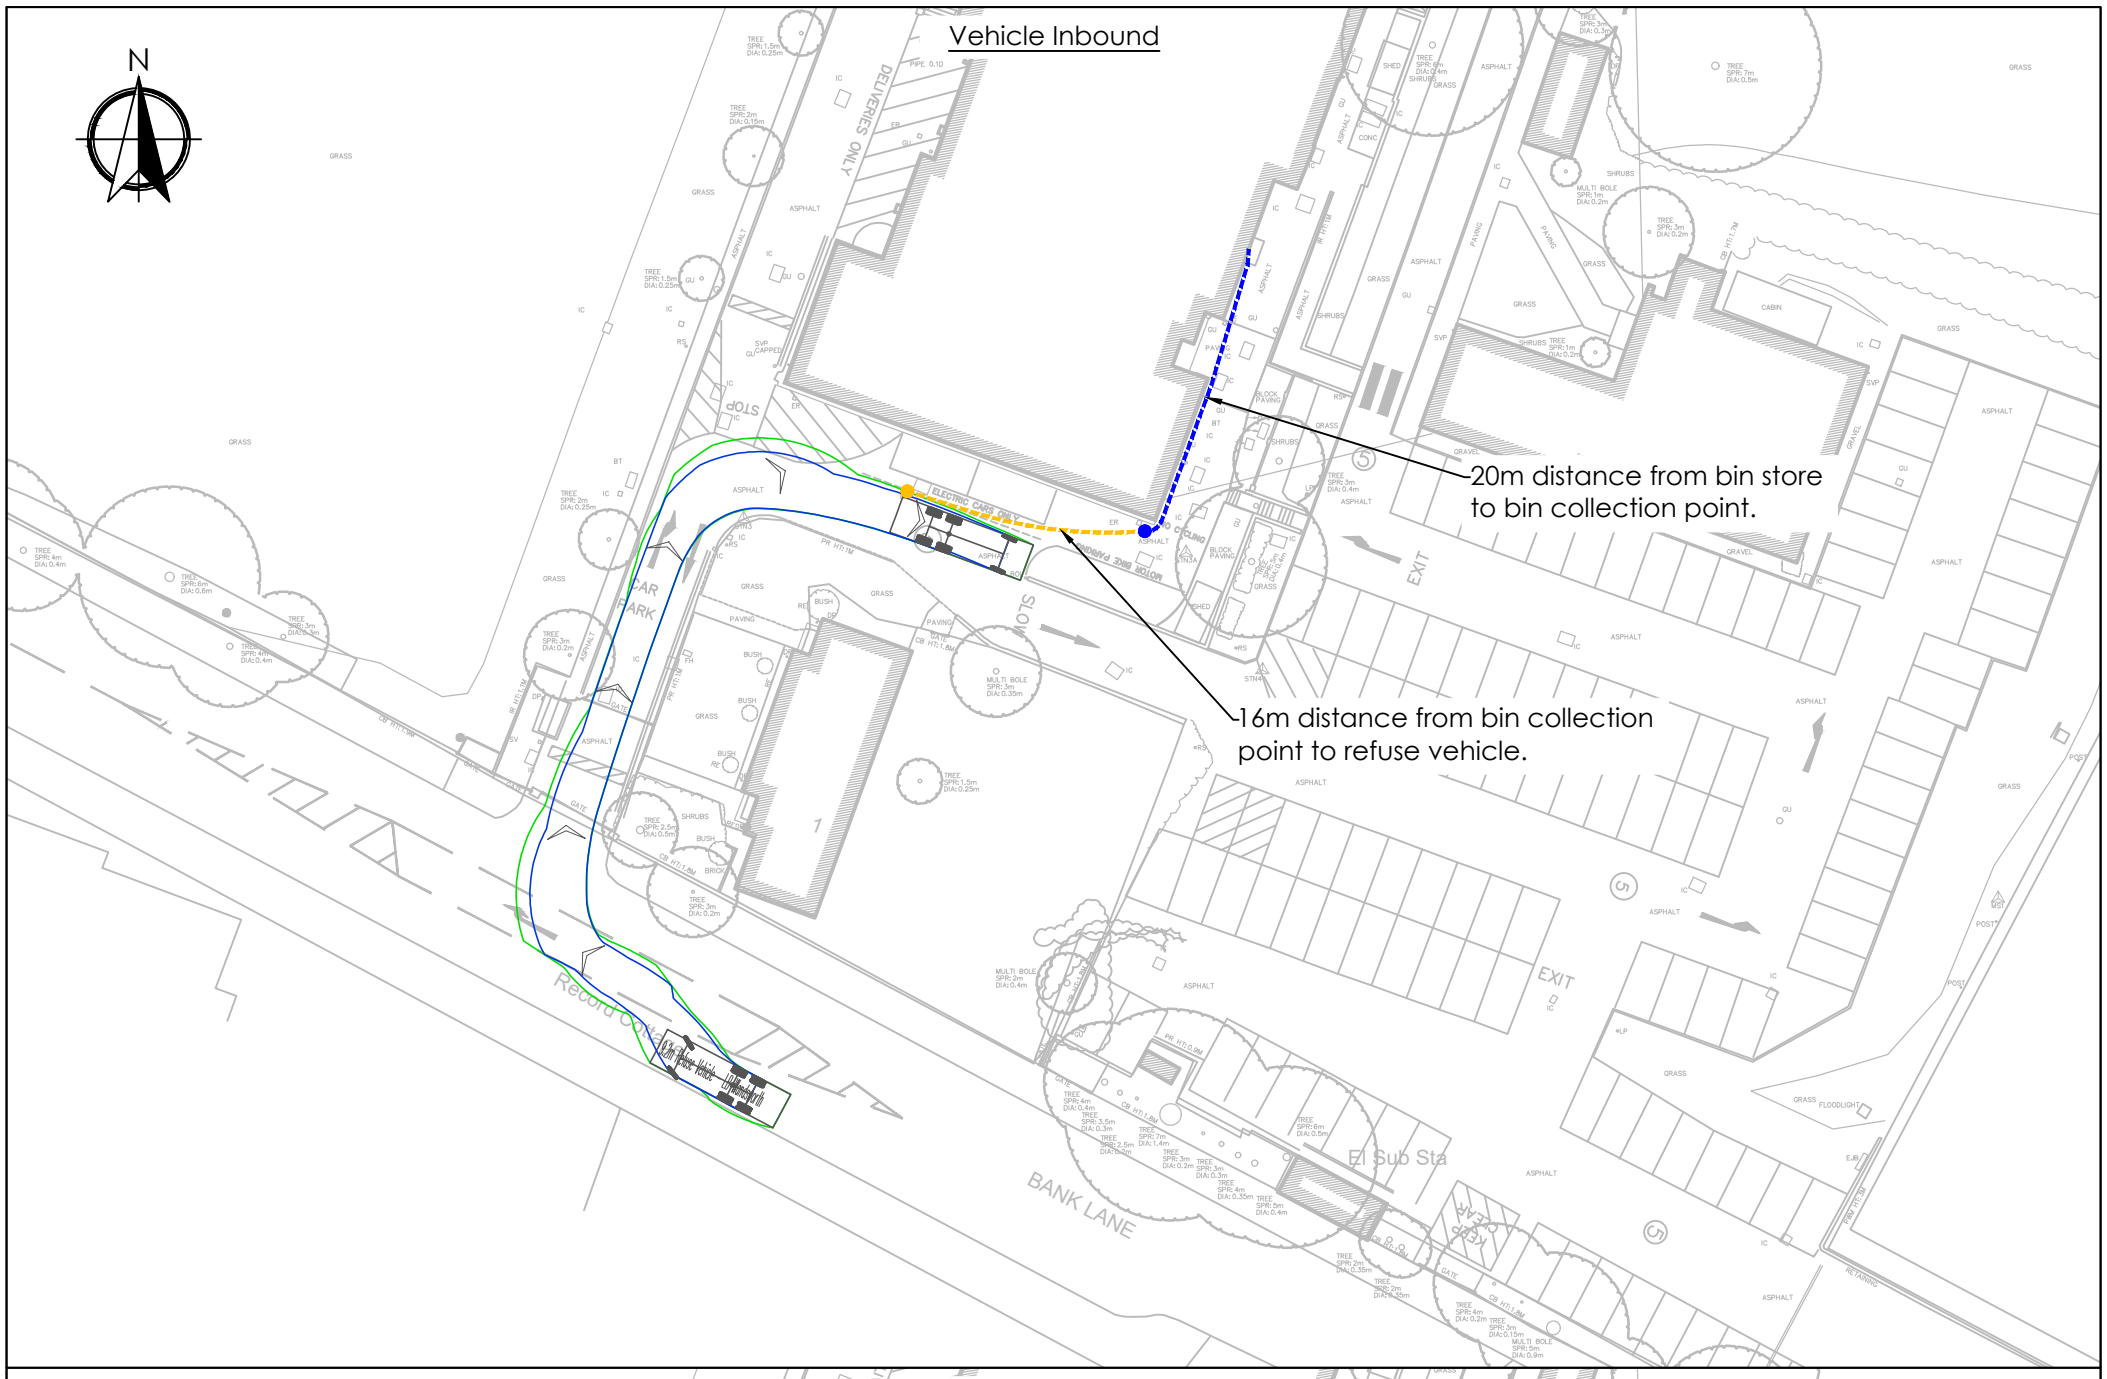



## Vehicle Outbound

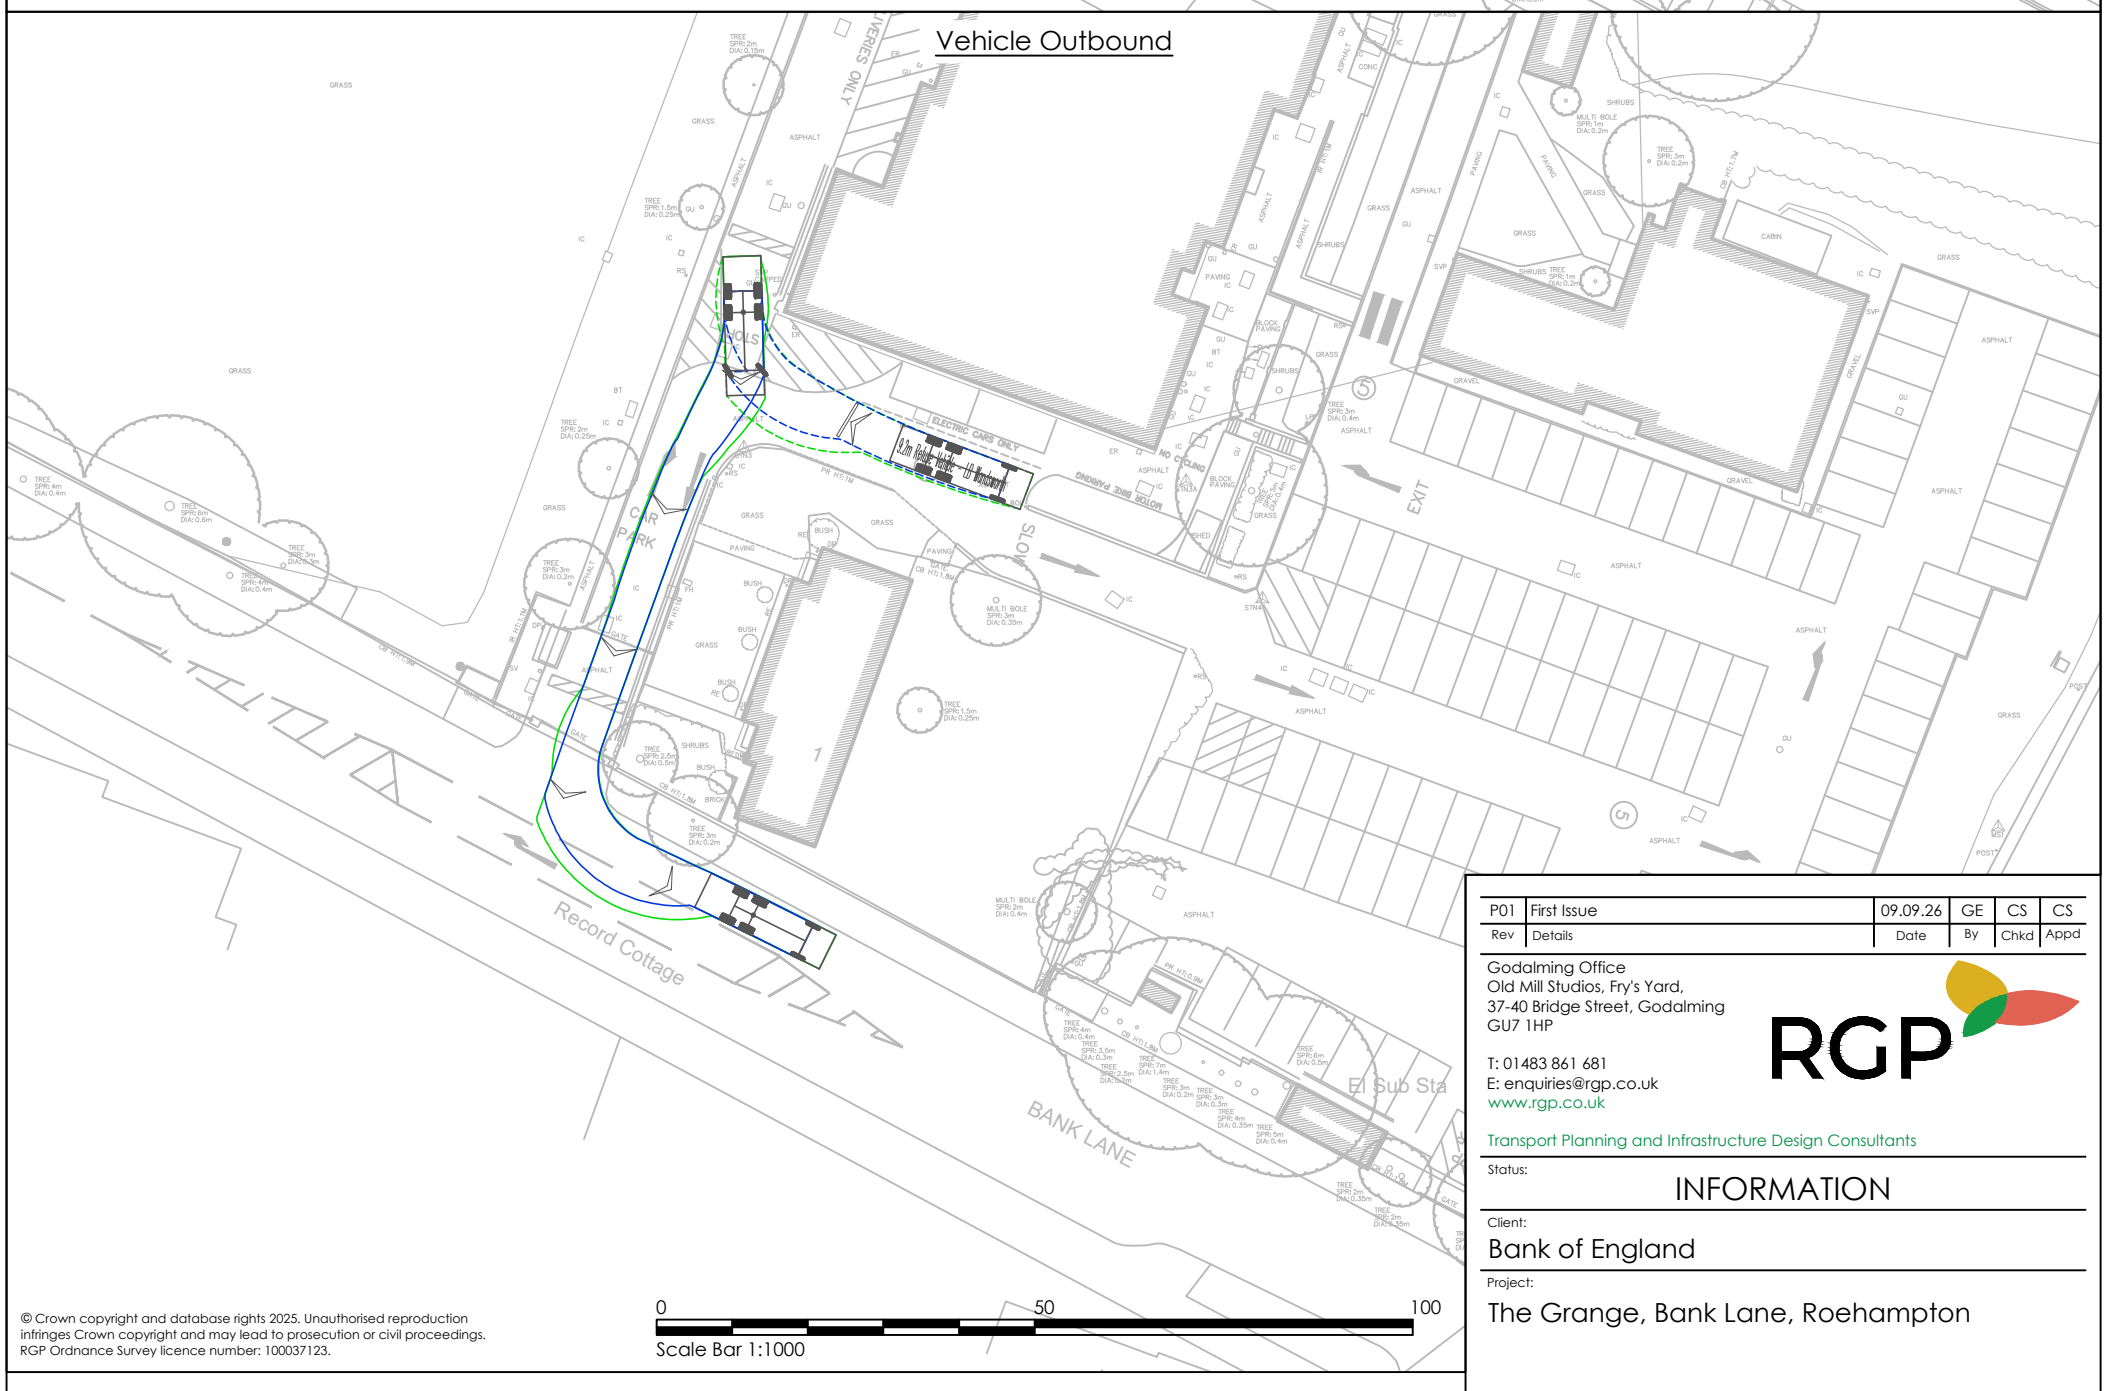


© Crown copyright and database rights 2025. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. RGP Ordnance Survey licence number: 100037123.

0 50 100

Scale Bar 1:1000



9.2m Refuse Vehicle - LB Wandsworth

| | |
|---|---|
| Overall Length | 9.200m |
| Overall Width | 2.500m |
| Overall Body Height | 3.400m |
| Min Body Ground Clearance | 0.250m |
| Track Width | 2.500m |
| Lock to lock time | 4.00s |
| Kerb to Kerb Turning Radius | 9.000m |

## Notes:

1. Do not scale from this drawing.
2. All dimensions are in metres unless noted otherwise.
3. All levels are in metres above ordnance datum (AOD).
4. This drawing should be printed in colour.
5. This drawing is to be read in conjunction with all other engineer's drawings.

| Rev | Details | Date | By | Chkd | Appd |
|---|---|---|---|---|---|
| P01 | First Issue | 09.09.26 | GE | CS | CS |

Godalming Office
Old Mill Studios, Fry's Yard,
37-40 Bridge Street, Godalming
GU7 1HP

T: 01483 861 681
E: enquiries@rgp.co.uk
www.rgp.co.uk

RGP

Transport Planning and Infrastructure Design Consultants

Status: INFORMATION

Client: Bank of England


Project: The Grange, Bank Lane, Roehampton

Drawing Title: Swept Path Assessment Refuse Vehicle

| Scale @ A3: | Date: | Drawn: | Designed: | Checked: | Approved: |
|---|---|---|---|---|---|
| 1:500 | 09.09.26 | GE | GE | CS | CS |


| Project No: | Drawing No: | Revision: |
|---|---|---|
| 9552 | TGL-RGP-XX-XX-DR-T-003 | P01 |

# APPENDIX A

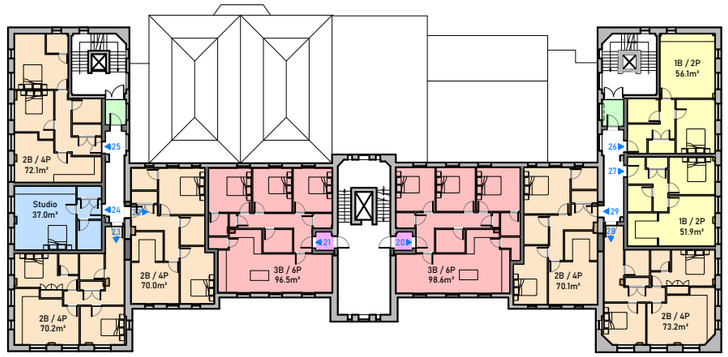


## Proposed Second Floor Plan

Scale 1:500 @ A3

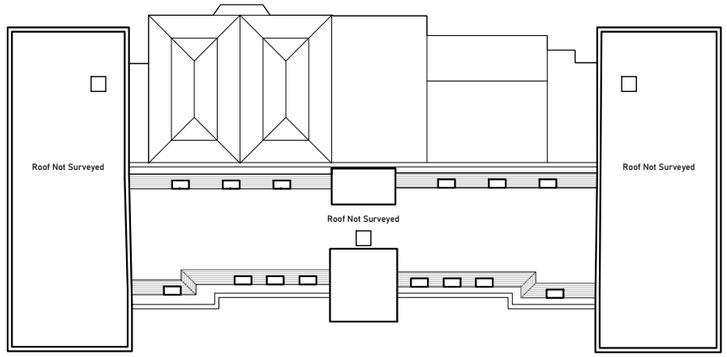



## Proposed Roof Plan

Scale 1:500 @ A3


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

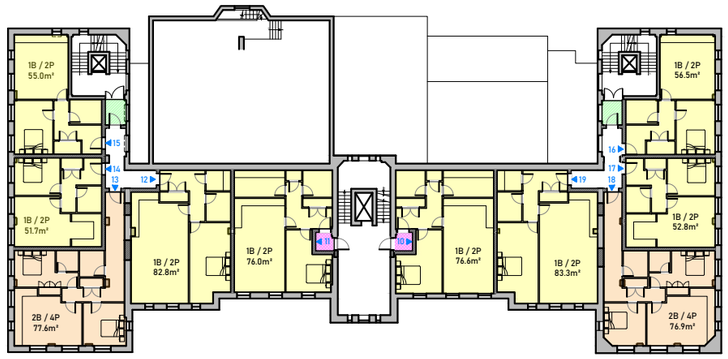



## Proposed First Floor Plan

Scale 1:500 @ A3

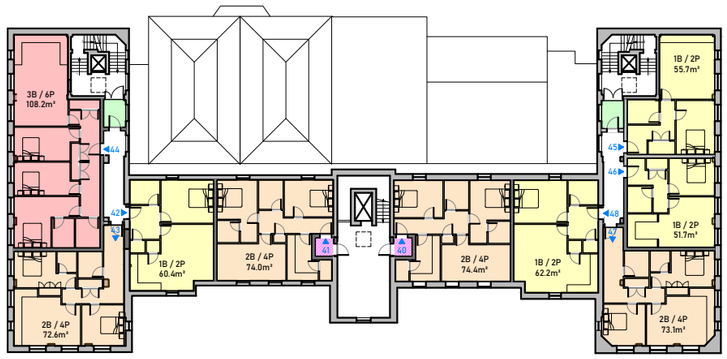



## Proposed Fourth Floor Plan

Scale 1:500 @ A3

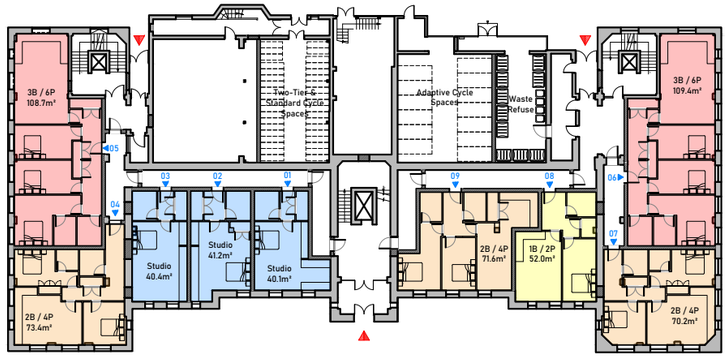


## Proposed Ground Floor Plan

Scale 1:500 @ A3

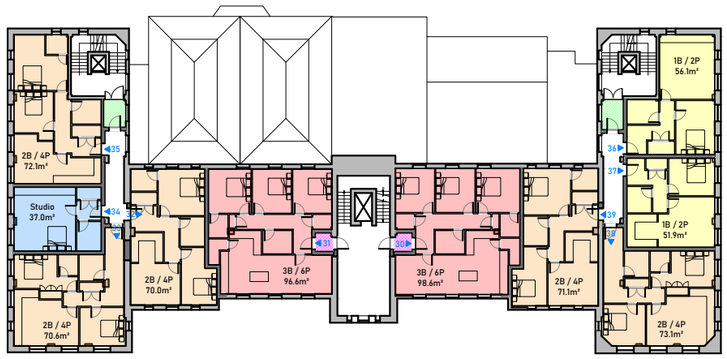


## Proposed Third Floor Plan

Scale 1:500 @ A3

0 25m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Scheme

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 200 | P00 |

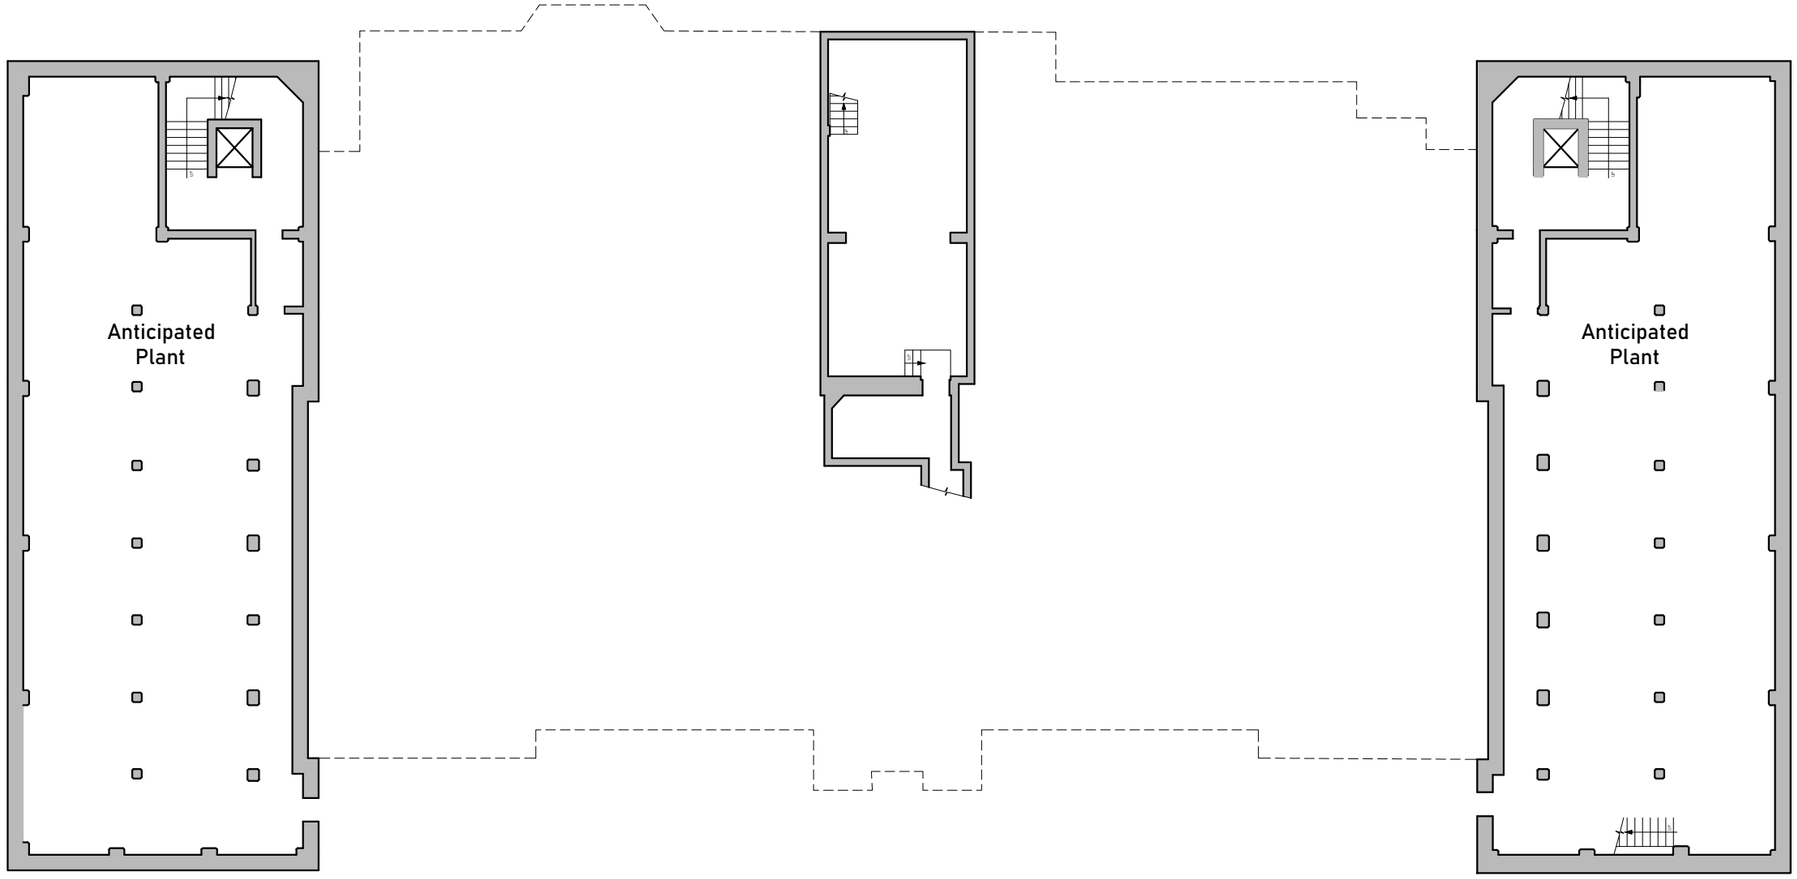


## Proposed Basement Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Basement Floor Plan

Project
The Grange, Bank Ln, London
SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 201 | P00 |

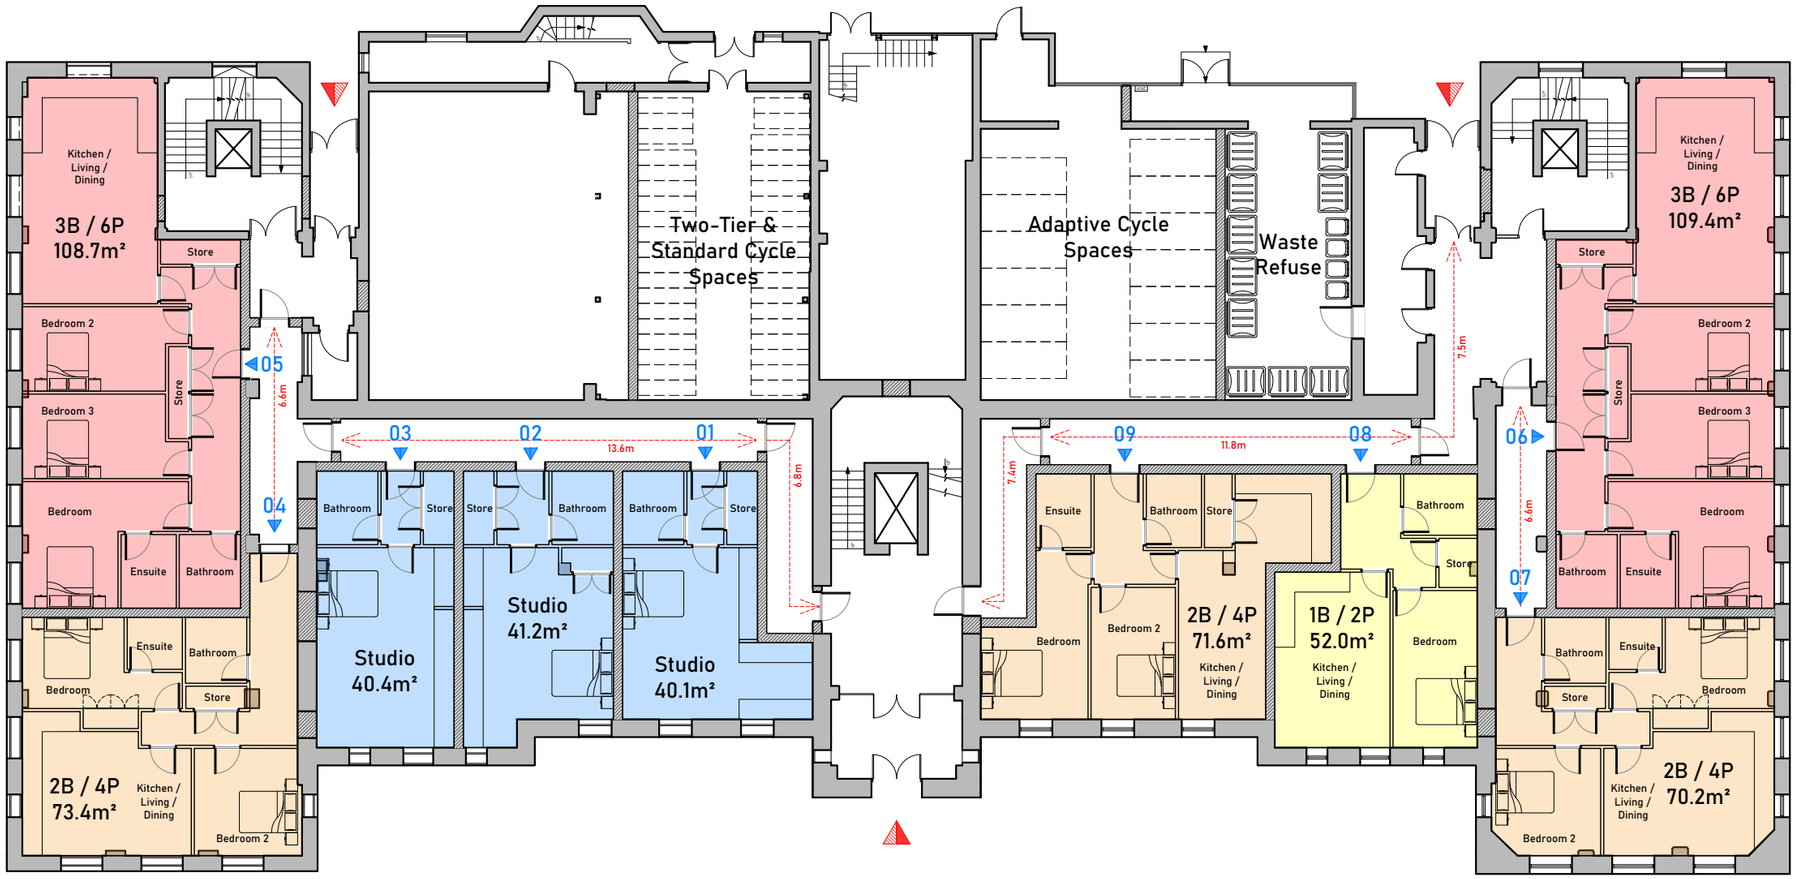


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

CYCLE STORE LEGEND:

- Standard Space
- Adaptive Space
- Two-Tier Space

WASTE REFUSE LEGEND:

- 240L
- 1100L
- 1260L

## Proposed Ground Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Ground Floor Plan

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 202 | P00 |

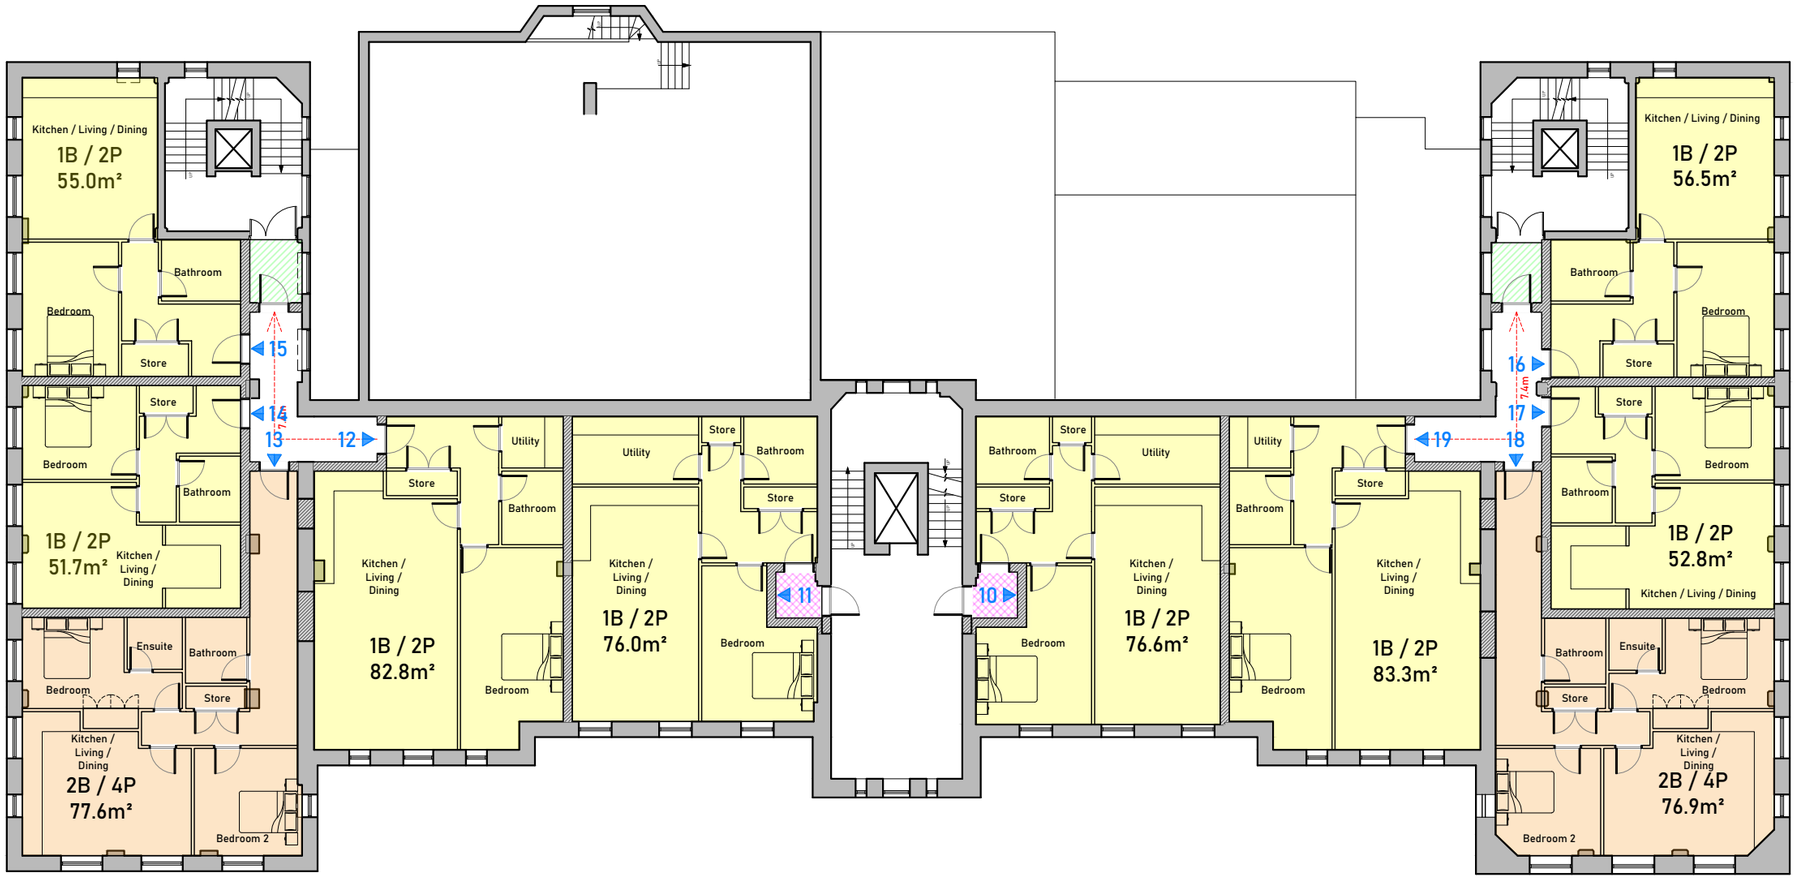


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

## Proposed First Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed First Floor Plan

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 203 | P00 |

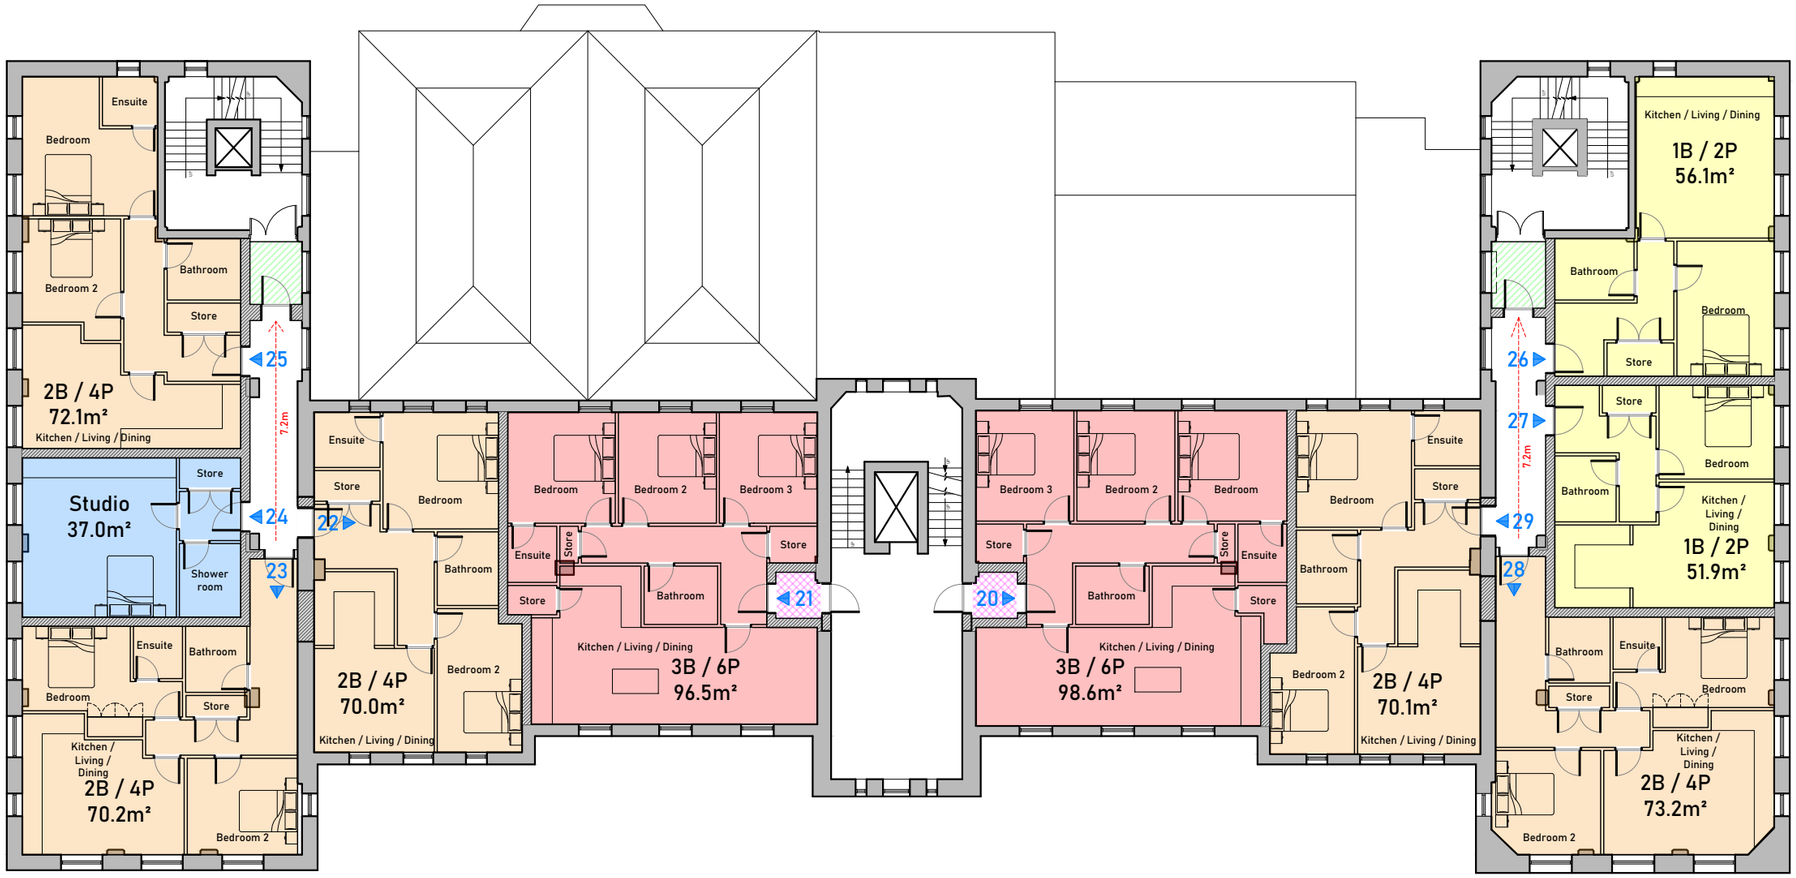


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

## Proposed Second Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Second Floor Plan

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 204 | P00 |

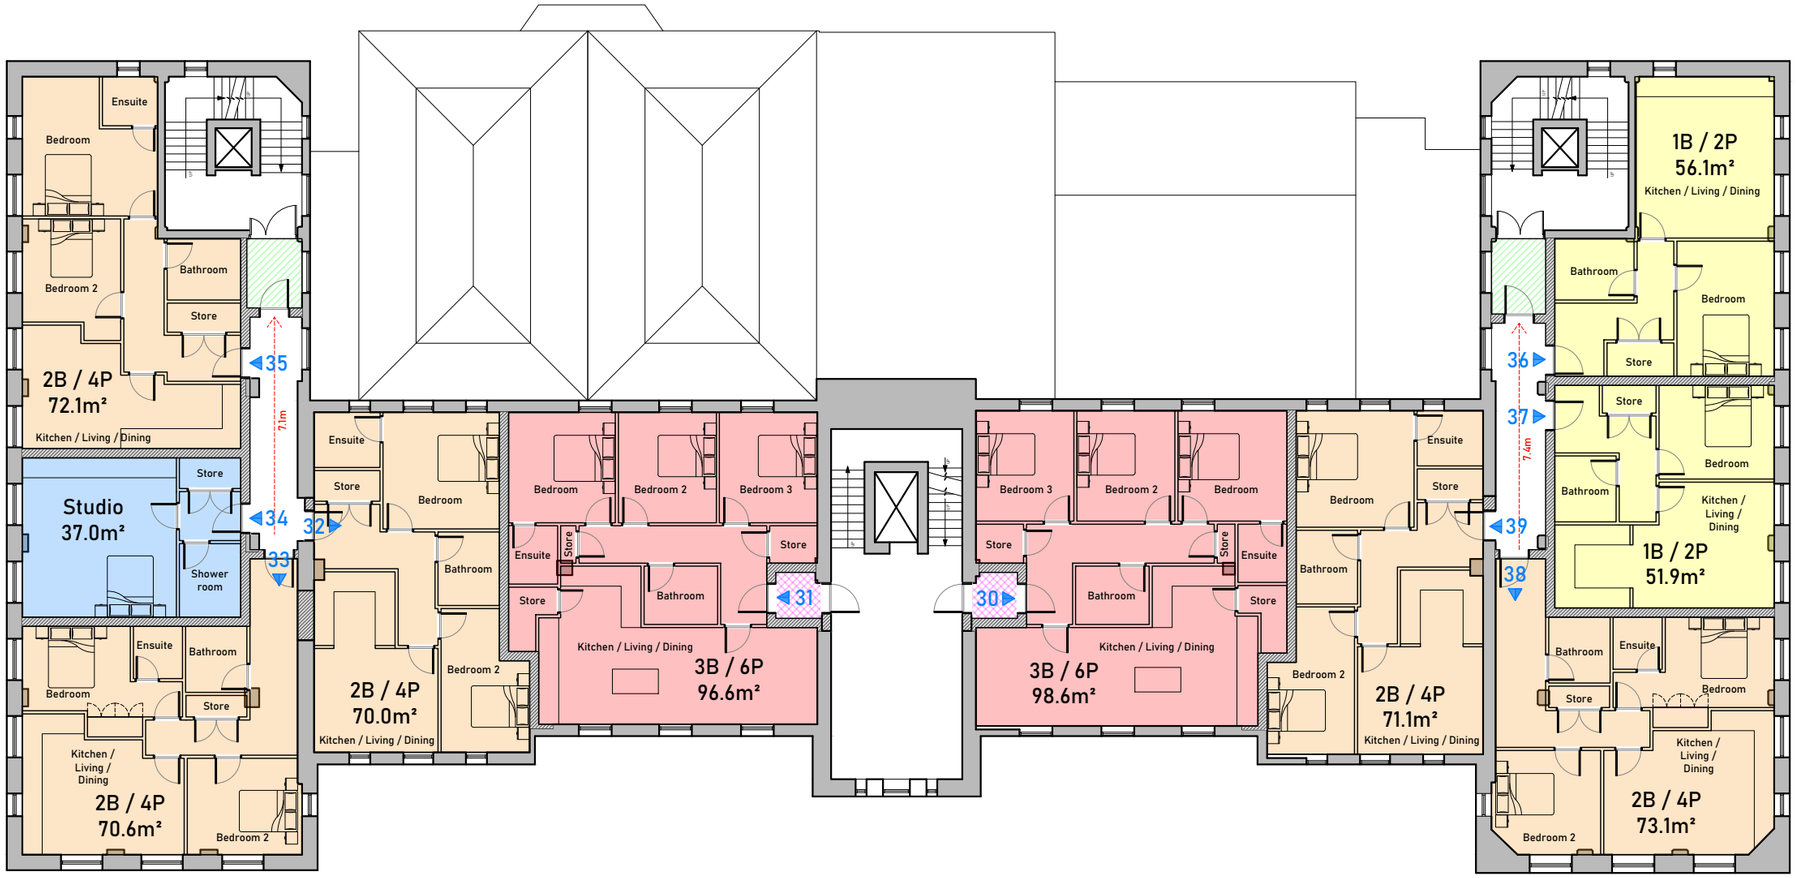


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

## Proposed Third Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Third Floor Plan

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 205 | P00 |

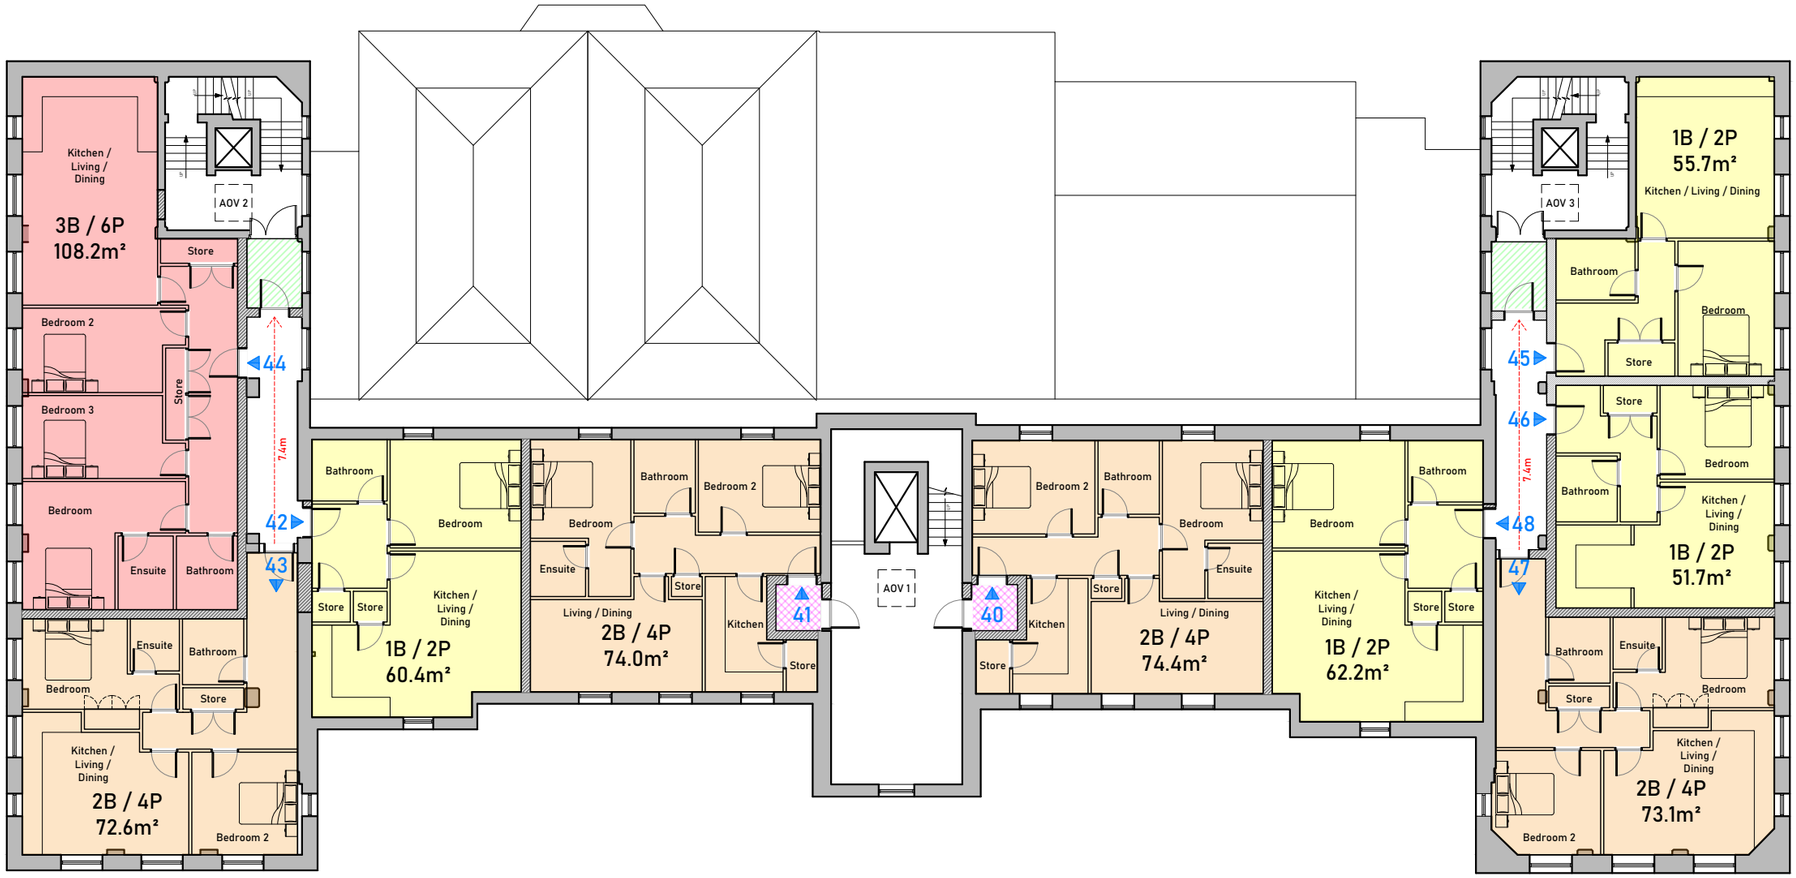


LEGEND:

- Studio Unit
- 1 Bed / 2 Persons Unit
- 2 Bed / 4 Persons Unit
- 3 Bed / 6 Persons Unit
- CORRIDOR ACCESS : Ventilated stair lobby, with no flat opening directly into it
- LOBBY ACCESS : Ventilated stair lobby, separating flat access from main stairwell

## Proposed Fourth Floor Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |


| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Fourth Floor Plan

Project
The Grange, Bank Ln, London SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 206 | P00 |

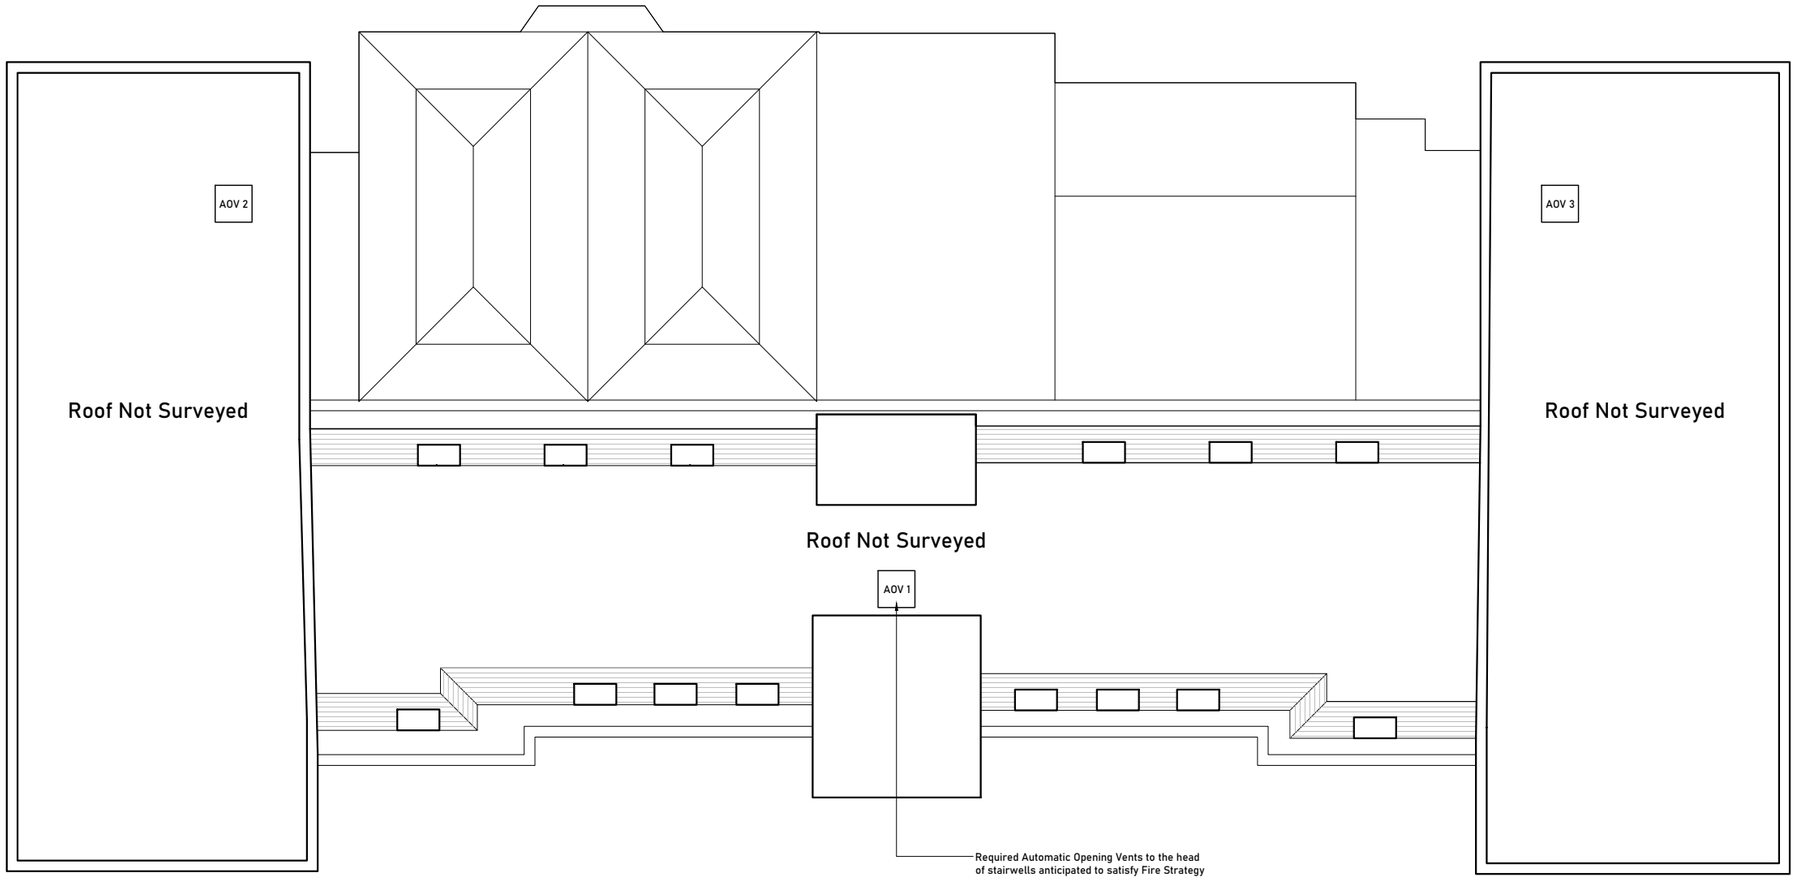


## Proposed Roof Plan

Scale 1:200 @ A3

0 10m

Issued For
PLANNING

General Notes:

THIS DRAWING HAS BEEN PREPARED BY MICHAEL EALES ARCHITECTS AND THE DATA CONTAINED HEREIN MAY BE USED OR REPRODUCED ONLY WITH MICHAEL EALES ARCHITECTS' APPROVAL.

| Rev. | Description | Date | Signed | Checked |
|---|---|---|---|---|
| | | | | |

| A3 Scale | Date | Drawn by | Checked by |
|---|---|---|---|
| 1:200@A3 | 03.08.26 | AL | ME |

Drawing Title
Proposed Roof Plan

Project
The Grange, Bank Ln, London
SW15 5JT

ME ARCHITECTS
UNIT 201 Media House,
Sopers Road, Potters Bar EN6 4RY
T - 07764 496 345
E - info@me-architects.co.uk

| Project no. | Drawing no. | Revision |
|---|---|---|
| 26/393 | 207 | P00 |

# APPENDIX B

**QS701EW - Method of travel to work**

ONS Crown Copyright Reserved [from Nomis on 23 September 2026]


| | |
|---|---|
| population | All usual residents aged 16 to 74 |
| units | Persons |
| date | 2011 |
| rural urban | Total |

| Method of Travel to Work | lsoa2011:E01004576 : Wandsworth 013D | % | msoa2011:E02000935 : Wandsworth 013 | % |
|---|---|---|---|---|
| | | 649 | | 2,646 |
| All categories: Method of travel t | 1,144 | 176% | 5,088 | 192% |
| Work mainly at or from home | 46 | 7% | 101 | 4% |
| Underground, metro, light rail, t | 86 | 13% | 321 | 12% |
| Train | 88 | 14% | 317 | 12% |
| Bus, minibus or coach | 183 | 28% | 897 | 34% |
| Taxi | 3 | 0% | 9 | 0% |
| Motorcycle, scooter or moped | 11 | 2% | 39 | 1% |
| Driving a car or van | 163 | 25% | 564 | 21% |
| Passenger in a car or van | 13 | 2% | 45 | 2% |
| Bicycle | 38 | 6% | 132 | 5% |
| On foot | 60 | 9% | 301 | 11% |
| Other method of travel to work | 4 | 1% | 21 | 1% |
| Not in employment | 449 | 69% | 2,341 | |

| Mode | Daily Two-Way-Trips | Percentage (%) |
|---|---|---|
| Underground, metro, light rail, tram | 86 | 13% |
| Train | 88 | 14% |
| Bus, minibus or coach | 183 | 28% |
| Taxi | 3 | 0% |
| Motorcycle, scooter or moped | 11 | 2% |
| Driving a car or van | 163 | 25% |
| Passenger in a car or van | 13 | 2% |
| Bicycle | 38 | 6% |
| On foot | 60 | 9% |
| Total | 649 | 100% |

## Map of E02000935 : Wandsworth 013

Close

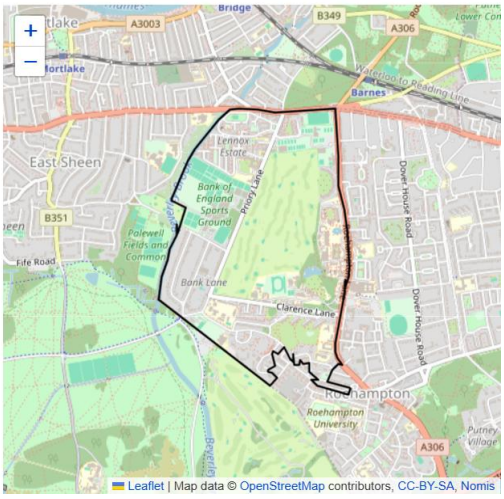

# APPENDIX C

**RM001 - Accommodation type by car or van availability by number of usual residents aged 17 years or over in household**

ONS Crown Copyright Reserved [from Nomis on 11 September 2026]

| | |
|---|---|
| population | All households |
| units | Households |
| date | 2021 |
| area type | ır output areas - middle layer |
| area name | 0935 : Wandsworth 013 |
| accommodation type | Total |

| Number of cars or vans | Total | One usual resident aged 17 years or over in household | | Two or more usual residents aged 17 years or over in household | |
|---|---|---|---|---|---|
| Total | 2,439 | 1,119 | | 1,320 | |
| No cars or vans in household | 1,262 | 777 | | 485 | |
| 1 car or van in household | 903 | 318 | 318 | 585 | 585 |
| 2 or more cars or vans in house | 274 | 24 | 53 | 250 | 550 |
| | | | 371 | | 1,135 |
| | 2.2 | | **0.331** | | **0.860** |

**RM001 - Accommodation type by car or van availability by number of usual residents aged 17 years or over in household**

ONS Crown Copyright Reserved [from Nomis on 11 September 2026]

| | |
|---|---|
| population | All households |
| units | Households |
| date | 2021 |
| area type | ır output areas - middle layer |
| area name | 0935 : Wandsworth 013 |
| accommodation type | caravan or other mobile or temporary structure |


| Number of cars or vans | Total | One usual resident aged 17 years or over in household | | Two or more usual residents aged 17 years or over in household | |
|---|---|---|---|---|---|
| Total | 2,118 | 1,042 | | 1,076 | |
| No cars or vans in household | 1,168 | 734 | | 434 | |
| 1 car or van in household | 778 | 289 | 289 | 489 | 489 |
| 2 or more cars or vans in house | 172 | 19 | 42 | 153 | 337 |
| | | | 331 | | 826 |
| | 2.2 | | **0.317** | | **0.767** |

| Unit Size | No. of Units | Typical car ownership/unit | Estimated parking demand |
|---|---|---|---|
| Studio | 5 | 0.317 | 2 |
| 1b2p | 17 | 0.476 | 8 |
| 2bed+ | 26 | 0.767 | 20 |
| | 48 | | 30 |

Assumed Occupany
1 person (studio)
1.5 person average (1b2p)
2+ people (2 and 3-bed units)

**Map of E02000935 : Wandsworth 013**

Close

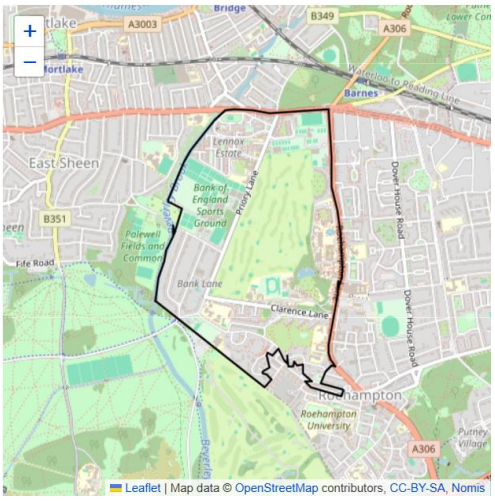

# APPENDIX D

# TRAVEL PLAN ACTION PLAN
# The Grange, Bank Lane, Roehampton

| Objective 1 – Promote and actively encourage sustainable travel to and from the site | | | |
|---|---|---|---|
| **Measure** | **Details** | **Responsibility** | **Implementation Timescales** |
| **Appoint a Travel Plan Coordinator (TPC)** | *Appoint TPC prior to occupation and trained to ensure they are fully aware of their responsibilities.* | Site Operator / Management Company | To be appointed prior to occupation. |
| **Promotion of nearby facilities** | *Highlight that several amenities and services are available locally within walking distance of the site.* | TPC | Prior to occupation and then ongoing for min. 5 years |
| **Bicycle Purchase Scheme** | *Promote the Ride2Work (cycle purchase) scheme to those residents in employment, who may be eligible.* | TPC | Subject to interest post-occupation - TPC to review with residents |
| **Local Cycle Shop Discounts** | *Discuss the potential for discounted bike/equipment purchase for residents.* | TPC | Subject to interest post-occupation - TPC to review with residents |
| **Bicycle maintenance** | *Provide training courses and/or invite Dr Bike to the site to provide bicycle maintenance classes for residents who can benefit from cycling locally.* | TPC | Subject to interest post-occupation - TPC to review with residents |
| **Public transport information** | *Publicise public transport routes, timetables and fare information to all residents.* | TPC | Prior to occupation and then ongoing for min. 5 years |
| **Public transport discounts** | *Discuss the potential for discounted travel for residents with the local bus operator.* | TPC | Post-occupation and reviewed annually |
| **Promotion of health, fitness and travel apps** | *Promote apps which allow for mobile handset planning of public transport trips and awareness of network issues and problems as well as other aspects of health, wellbeing and fitness.* | TPC | Prior to occupation and then ongoing for min. 5 years |

| Objective 1 – Promote and actively encourage sustainable travel to and from the site | | | |
|---|---|---|---|
| **Promotion of car sharing** | *Promote car share databases such as liftshare.com to all residents.* | TPC | Prior to occupation and then ongoing for min. 5 years with quarterly reviewing |
| **Provision of website information** | *Promote opportunities and benefits of sustainable travel, highlighting rail, bus, cycling and walking routes locally.* | TPC | Prior to occupation and then ongoing for min. 5 years with quarterly reviewing |
| **Social media promotion** | *Promotion of travel events/information via social media sites such as X, Facebook and any other community-based pages.* | TPC | Post-occupation, updated as and when necessary |
| **Promote Travel Plan in Sales Literature** | *Display and make promotional travel material available as part of the sales pack and show home for the site, so that prospective residents are aware of the Travel Plan prior to property purchase.* | Developer / TPC | Prepare prior to property purchase |
| **Provision of Resident Welcome Pack** | *Travel information communicated via a Resident's Welcome Pack to be distributed upon move-in.* | Developer / TPC | Prepare and distribute prior to occupation. |
| **Organisation of Travel Planning Events** | *Organise a Travel Plan Event (e.g. Sponsored Walk) to tie in with national events and promote the Travel Plan.* | TPC | Implement in conjunction with a national event such as Cycle to Work Day, National Liftshare Week. |

| Objective 2 – Provide the on-site infrastructure to facilitate sustainable travel | | | |
|---|---|---|---|
| **Broadband Internet Connection** | *Equip all homes with a super-fast broadband connection to support home working and internet shopping.* | Design Team & Construction Company | Implemented at construction phase |
| **Infrastructure Improvements** | *Enhanced Connections to the local active travel network at the north and northeast of the site.* | Design Team & Construction Company | Implemented at construction phase |
| **Electric Vehicle Charging Points (EVCPs)** | *Provide EVCPs within the car park area* | Design Team & Construction Company | Implemented at construction phase |

| Objective 2 – Provide the on-site infrastructure to facilitate sustainable travel | | | |
|---|---|---|---|
| **Travel Noticeboard** | *A Travel Noticeboard will be established in a prominent place on-site. This will include walking and cycling maps/ routes, bus and rail timetable information.* | Site Management Company / TPC to install | Prior to opening and reviewed quarterly. |
| **Cycle Parking** | *Provide cycle parking at each dwelling.* | Design Team & Construction Company | Implemented at construction phase |



**RGP** - Transport Planning and Infrastructure Design Consultants

enquiries@rgp.co.uk www.rgp.co.uk

**Surrey Office** Old Mill Studios, Fry's Yard, 37-40 Bridge Street, Godalming GU7 1HP T: 01483 861 681
**London Office** 10 York Road, London SE1 7ND T: 020 7078 9662



RGP Consulting Engineers Limited • Registered in England No. 4237910 • Old Mill Studios, Fry's Yard, 37-40 Bridge Street, Godalming GU7 1HP • Vat Registration No. 771 9281 04