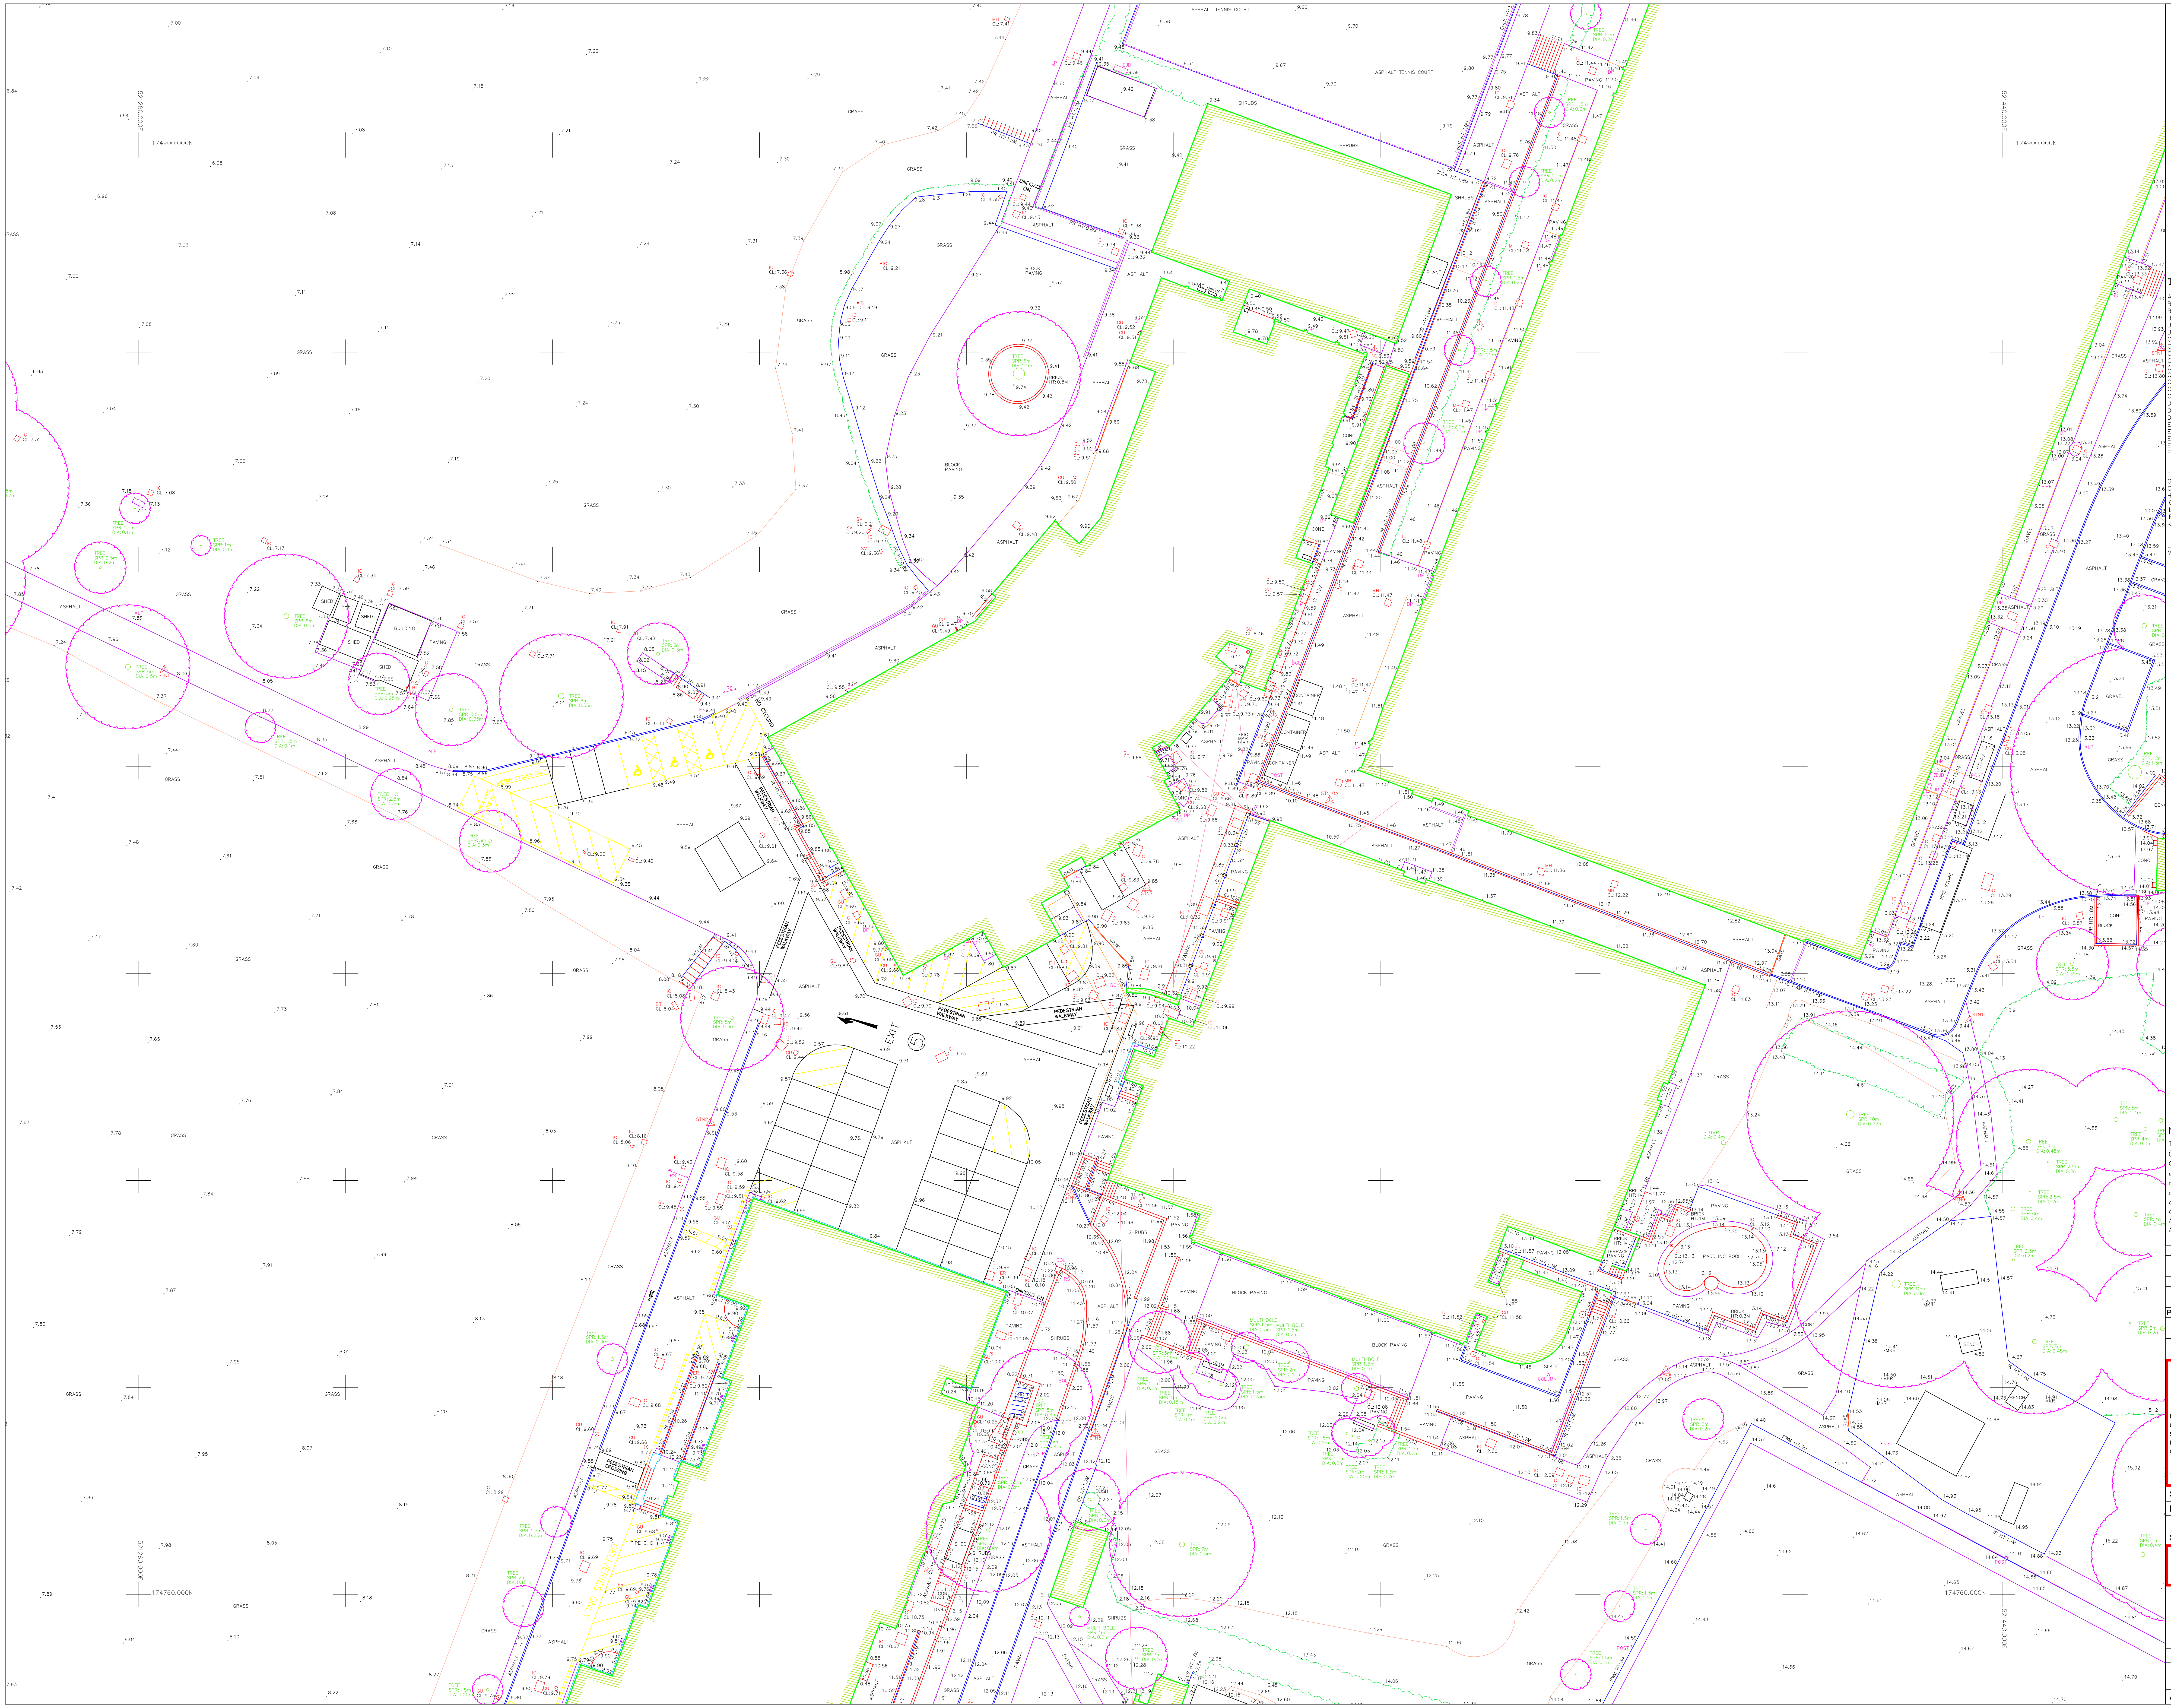

OS NORTH

## Topographical Abbreviations

| | |
|---|---|
| A/R | Assumed Route |
| BH | Borehole |
| BOL | Bollard |
| BT | British Telecom Cover |
| BW | Barbed Wire Fence |
| BWK | Brickwork |
| CATV | Cable TV Cover |
| CB | Close Boarded Fence |
| CCTV | Closed Circuit TV |
| CHLK | Chainlink Fence |
| CHPL | Chestnut Paling Fence |
| CL | Cover Level |
| CM | Cable Marker |
| CP | Catch Pit |
| CPL | Catch Pit Base Level |
| DIA | Diameter |
| DK | Drop Kerb |
| DP | Down Pipe |
| EJB | Electricity Junction Box |
| EC | Electricity Cover |
| EP | Electricity Pole |
| ER | Earthing Rod |
| FCL | Finished Ceiling Level |
| FH | Fire Hydrant |
| FIG | Feed Into Ground |
| FW | Foul Water |
| GU | Gully |
| GV | Gas Valve |
| H | Height |
| IC | Inspection Cover |
| IL | Invert Level |
| IR | Iron Railing Fence |
| KO | Kerb Outlet |
| LB | Litter Bin |
| LC | Lamp Column |
| LP | Lamp Post |
| MH | Manhole |
| MKR | Marker |
| MT | Mercury Telecom Cover |
| OHC | Overhead Cable |
| OHP | Overhead Pipe |
| OSBM | Ordnance Survey Bench Mark |
| PB | Post Box |
| PGM | Permanent Ground Marker |
| PR | Post & Rail Fence |
| PW | Post & Wire Fence |
| PWM | Post & Wire Mesh Fence |
| RE | Rodding Eye |
| RG | Road Gully |
| RN | Road Name |
| RS | Road Sign |
| RW | Retaining Wall |
| RWP | Rain Water Pipe |
| SAP | Sapling |
| SC | Stop Cock |
| SPR | Spread |
| STA | Traverse Station |
| SV | Stop Valve |
| SVP | Soil Vent Pipe |
| SW | Storm Water |
| TB | Telephone Box |
| TBM | Temporary Bench Mark |
| TFR | Taken From Records |
| TJB | Telephone Junction Box |
| TPT | Trial Pit |
| TL | Traffic Light |
| TP | Telephone Pole |
| UTL | Unable To Lift |
| UTT | Unable To Trace |
| VP | Vent Pipe |
| WKH | Water Key Hole |
| WM | Water Meter |
| WV | Water Valve |

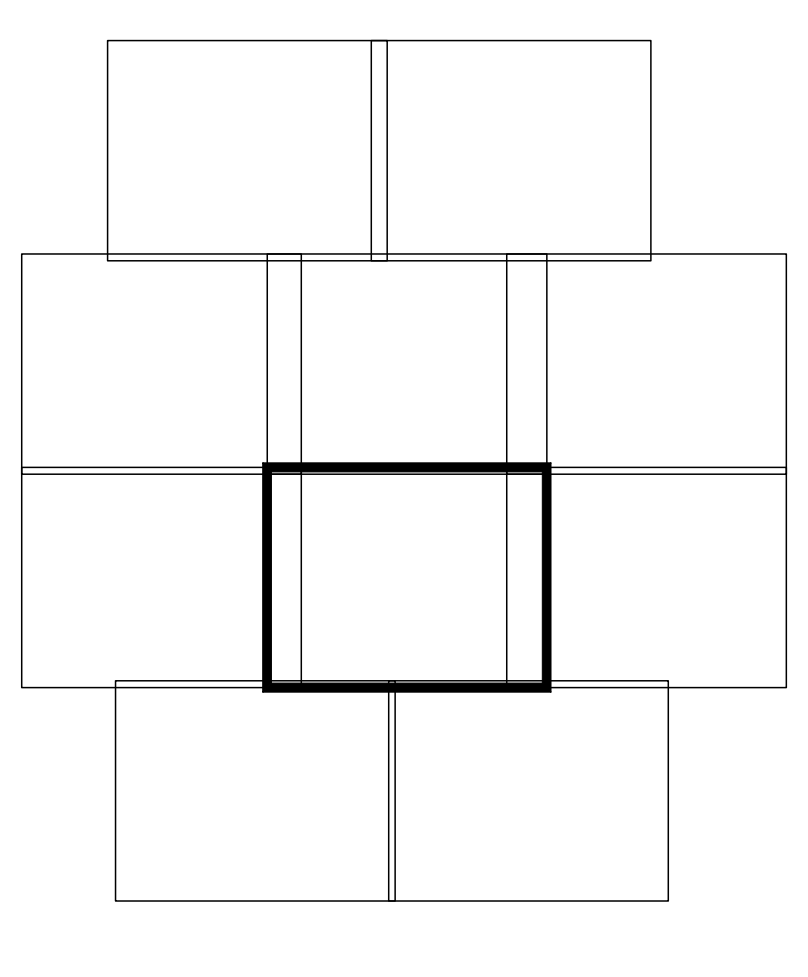

SURVEY STATIONS

| Name | Easting | Northing | Height |
|---|---|---|---|
| STN1 | 521262.519 | 174849.262 | 8.041 |
| STN2 | 521315.276 | 174805.562 | 9.502 |
| STN3 | 521296.543 | 174734.921 | 10.006 |
| STN3A | 521325.796 | 174732.695 | 10.239 |
| STN4 | 521330.858 | 174724.919 | 12.010 |
| STN5 | 521352.432 | 174775.613 | 12.065 |
| STN6 | 521350.008 | 174798.840 | 10.161 |
| STN7 | 521357.410 | 174828.260 | 9.860 |
| STN8 | 521407.524 | 174781.629 | 13.079 |
| STN9 | 521435.890 | 174798.616 | 14.581 |
| STN10 | 521436.869 | 174815.469 | 13.589 |
| STN10A | 521375.054 | 174836.682 | 11.467 |
| STN11 | 521455.372 | 174880.404 | 13.898 |
| STN12 | 521480.367 | 174945.522 | 15.257 |
| STN13 | 521525.037 | 174949.608 | 15.851 |
| STN14 | 521550.191 | 174939.276 | 16.584 |
| MS1 | 521379.495 | 174709.811 | 14.856 |
| MS2 | 521445.277 | 174644.985 | 17.117 |
| MS3 | 521466.199 | 174703.187 | 16.998 |
| MS4 | 521492.208 | 174754.395 | 17.952 |
| MS5 | 521497.177 | 174803.850 | 16.048 |
| MS6 | 521531.670 | 174861.464 | 16.339 |
| N1 | 521369.629 | 174844.930 | 9.900 |
| N2 | 521379.399 | 174880.147 | 9.530 |
| N3 | 521389.511 | 174882.670 | 11.688 |
| SF1 | 521186.539 | 174899.218 | 6.595 |
| SF2 | 521163.026 | 175008.041 | 6.112 |
| SF3 | 521193.121 | 175090.245 | 6.623 |
| SF4 | 521291.491 | 175056.992 | 6.663 |
| SF5 | 521316.578 | 175096.307 | 7.103 |
| SF6 | 521440.285 | 175028.670 | 11.629 |
| SF7 | 521389.355 | 175056.556 | 9.396 |
| SF8 | 521537.665 | 174988.646 | 15.324 |
| SF9 | 521424.488 | 174971.359 | 11.481 |

## Notes

The survey has been oriented to Ordnance Survey (OS) National Grid (OSGB36) using Industry Standard Network RTK GPS equipment utilising the OS Active Network (OS Net). A true OSGB36 coordinate has been established on site using the OSTN15 (transformation) & OSGB15 (geoid) models. The survey detail has been correlated to this point and a further one (or more) OSGB36 points established to produce a true OS bearing for angle orientation. Scale factor 1.0 has been applied therefore the survey coordinates are shown on a pseudo OS grid.

All levels are in metres unless otherwise specified

All heights are in millimetres unless otherwise specified

| Rev | Svyr | QA Check | Description | Date |
|---|---|---|---|---|
| 5 | - | - | - | - |
| 4 | - | - | - | - |
| 3 | - | - | - | - |
| 2 | - | - | - | - |
| 1 | - | - | - | - |
| 0 | | AH | First Complete Issue | 27/08/2019 |
| Prelim | | - | Preliminary - Not Complete | - |

© Copyright Warner Surveys

Drawn in BricsCAD – www.bricsys.com
part of www.hexagon.com

**WARNER SURVEYS**
Land and Engineering Surveying Since 1979

Unit 22, Theale Lakes Bus. Pk, Moulden Way READING. RG7 4GB T +44 (0)118 930 3314
G.3 Bedford House, 69-79 Fulham High St LONDON. SW6 3JW T +44 (0)203 651 7549
5th Floor 1 Temple Way BRISTOL. BS2 0BY T +44 (0)117 301 8137
Unit G9, The Arch, 48-52 Floodgate St BIRMINGHAM. B5 5SL T +44(0)121 752 1220
Queens Court, 9-17 Eastern Road ROMFORD. RM1 3NH T +44(0)121 752 1220

www.warnersurveys.com
contact@warnersurveys.com
Topographic, Utility, Measured Building & UAV Surveys
Construction, Site Engineering & 3D Laser Scanning
Movement, Deformation & Environmental Monitoring
Oil, Gas & Industrial Surveying & Dimensional Control

| | |
|---|---|
| SURVEYED | WS |
| DRAWN | WS |
| SCALE | 1: 200 |

Gerald Eve

## Bank of England Sports Centre

## TOPOGRAPHICAL SURVEY

| JOB No | DRAWING NUMBER |
|---|---|
| RT/319/0418 | RT/319/0418/P/0007 |

A0 Sheet - 1,189mm X 841mm